


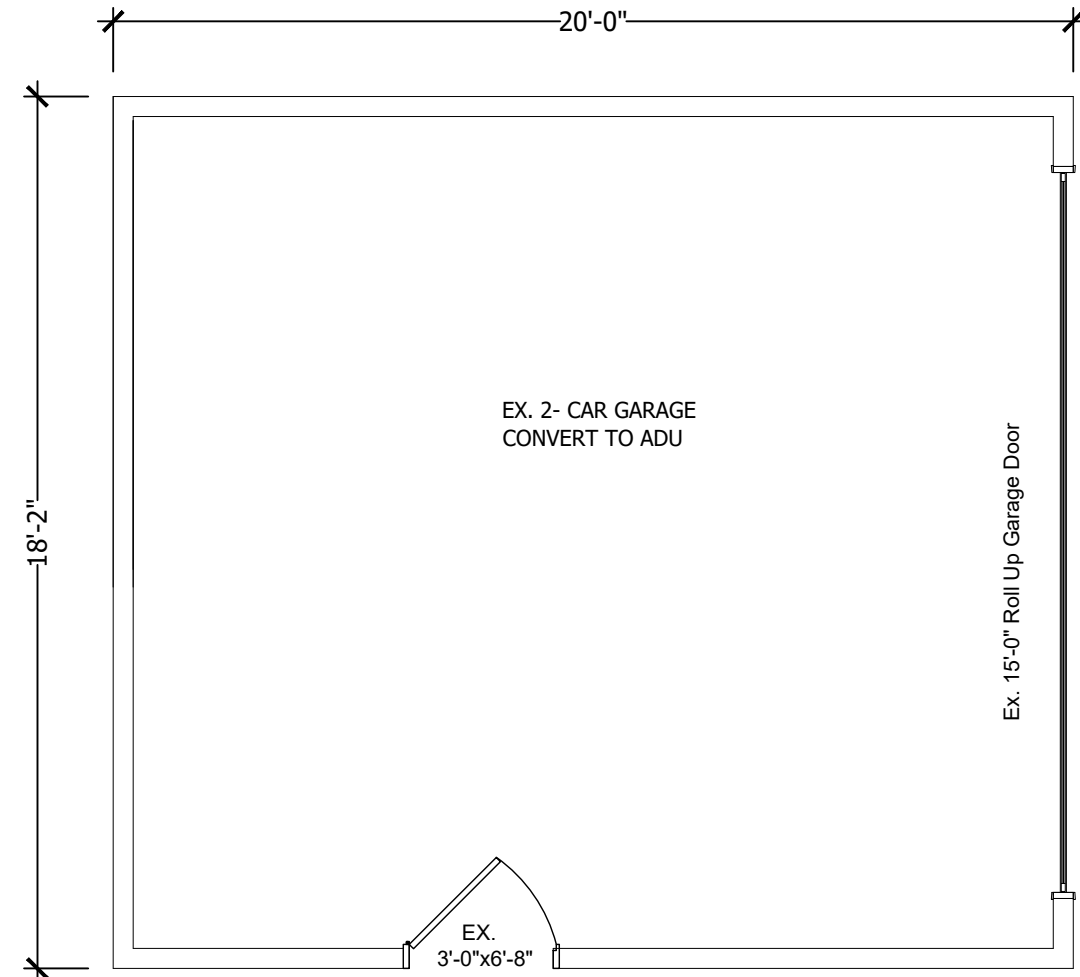

FIRE SPRINKLER SYSTEM
NOT REQUIRED

DOOR SCHEDULE					
SYMBOL	QTY.	NOMINAL SIZE	DOOR TYPE	FINISH	HEADER
①	1	3'-0"x6'-8"	SOLID CORE DOOR	PAINTED	4x6x40"
②	7	2'-8"x6'-8"	HOLLOW CORE	PAINTED	4x4x36"
③	2	6'-0"x6'-8"	ALUMINUM SLIDER	MIRROR	4x8x76"
④	1	5'-0"x6'-8"	ALUMINUM SLIDER	MIRROR	4x8x64"
⑤	1	2'-0"x6'-8"	HOLLOW CORE	PAINTED	4x4x28"

WINDOW SCHEDULE						
SYMBOL	QTY.	NOMINAL SIZE	WINDOW TYPE	GLASS	FINISH	HEADER
①	1	5'-0"x4'-0"	VINYL SLIDER	-	PAINTED	4x6x6'4"
②	4	4'-0"x4'-0"	VINYL SLIDER	-	PAINTED	4x6x5'2"
③	1	3'-0"x3'-0"	SLIDER/TEMP.	-	PAINTED	4x4x5'0"
④	2	2'-0"x2'-0"	SLIDER/TEMP.	-	PAINTED	4x4x2'8"
⑤	1	3'-0"x4'-0"	VINYL SLIDER	-	PAINTED	4x4x4'0"

Show detailed specs
Hide detailed specs
Generation
3rd Generation
Color
Stainless Steel
White
Black
Copper
Screen
24-bit color LCD
480 x 480 resolution at 229 pixels per inch (PPI) 2.08 in (5.3 cm) diameter Compatibility The Nest Learning Thermostat works with 95% of 24V heating and cooling systems, including gas, electric, forced air, heat pump, radiant, oil, hot water, solar and geothermal.
Heating: 1, 2, and 3 stages (W1, W2, W3)
Cooling: 1 and 2 stages (Y1, Y2)
Heat pump: with auxiliary and emergency heat (O/B, AUX, E)
Humidifier or dehumidifier (HUM, DEHUM)
Fan (G)
Power (C, RH, RC)
Sensors
Temperature
Humidity
Near-field activity
Far-field activity
Ambient light
Wireless
Wi-Fi 802.11 b/g/n @ 2.4GHz, 5GHz 802.15.4 @ 2.4GHz
Bluetooth Low Energy (BLE)
Size and weight
Display
Mass: 7.25 oz (205.4 g)
Diameter: 3.3 in (8.4 cm)
Height: 1.06 in (2.69 cm)
Base
Mass: 1.35 oz (38.3 g)
Diameter: 3 in (7.6 cm)
Height: 0.42 in (1.1 cm)
Assembled
Mass: 8.6 oz (243.7 g)
Diameter: 3.3 in (8.4 cm)
Height: 1.21 in (3.08 cm)
Battery
Built-in rechargeable lithium-ion battery
Power consumption
Less than 1 kWh/month
Remote control requirements
Wi-Fi Connection with internet access
Nest app on phone or tablet with Android or iOS.
See the Nest app requirements for supported versions. Latest version of Safari, Chrome, Firefox or Internet Explorer on Mac OS X v10.9 or later and Windows 7 or later
Certification
Energy Star
Multi-home support
Multi-zone homes You can control up to 20 thermostats per home.
Nest in three homes You can control Nest Thermostats in three locations from one Nest account.
Green
RoHS compliant
REACH compliant
Recyclable packaging
Title 20 battery charger compliant
Learn more at nest.com/responsibility
Warranty
2-year limited warranty. For support, visit nest.com/support Our support team is also available by phone 24/7.
In the box
Display
Base
Optional trim kit
Mounting screws and labels
Nest screwdriver
Installation Guide
Welcome Guide
Nest Pro Installation card

- 1 SMOKE DETECTOR AND CARBON MONOXIDE, 110V.
AT NEW BUILDINGS SHALL BE A PERMANENT WIRING
WITHOUT ANY DISCONNECTING SWITCH OTHER THAN
THOSE FOR OVER CURRENT PROTECTION, INTERCONNECTED
AND EQUIPPED WITH A BATTERY BACK-UP.
- 2 FAN FOR MECHANICAL VENTILATION PROVIDING
5 AIR CHANGES PER HOUR (91.1 203.3)
FANS SHALL BE ENERGY STAR COMPLIANT AND BE DUCTED TO
TERMINATE TO THE OUTSIDE OF THE BUILDING. FANS SHALL
BE CONTROLLED BY A HUMIDITY CONTROL.
- 3 ALL SHOWERS AND BATH TUB, 70" HT. TILE OR APPROVED
MOISTURE RESISTANT MATERIAL WITH TEMPERED GLASS DOOR.

EXISTING WALLS:

WALLS TO BE DEMOLISHED:

NEW EXTERIOR/ INTERIOR WALLS:

EX. DOOR/ WINDOW TO BE REMOVED: