


GE Profile™ Steam Closet with Fabric Refresh

ELECTRIC RATING

120V	11.0A, 60Hz
------	-------------



Specification Revised 6/25

PFH18HSPVMC



GE Profile™ Steam Closet with Fabric Refresh

INSTALLATION LOCATION:

- A grounded electrical outlet should be located within 2' (61cm) of either side of the appliance.
- Install the appliance on a level floor (Allowable slope under the appliance 1").
- The floor must be level, with a maximum slope of 1" (2.5cm) under the appliance. If the slope is greater than 1" (2.5 cm), the appliance cannot be levelled properly.
- The appliance should be easily accesible if it needs to be serviced.
- Do not install the appliance in an area where it will be exposed to water and/or weather. Failure to follow this warning could result in risk of electric shock, injury, or product damage or malfunction.
- Do not install the appliance on a hollow or flexible platform. Doing so may cause excessive noise and vibration and result in damage or injury if the appliance tips over.

RECCOMENDED INSTALLATION SPACING FOR RECESSED AREA OR CLOSET:

- Minimum clearances 1 3/16" (3cm) on all sides and rear.
- Allow at least 18" (46cm) to open the front door.
- Allow at least 2" (5cm) on both sides and between the back of the appliance and the wall.
- Allow at least 7 3/4" (20cm) between the top of the appliance and any overhanging shelves or cabinets.

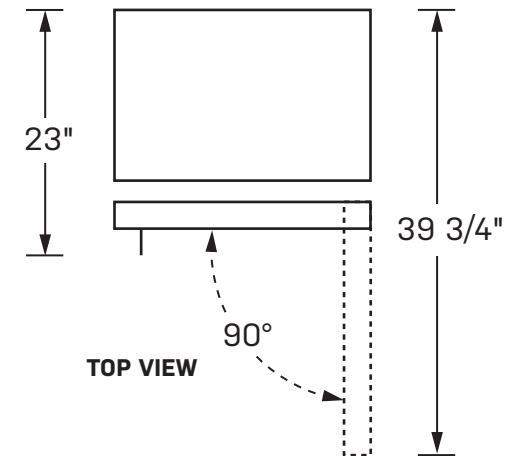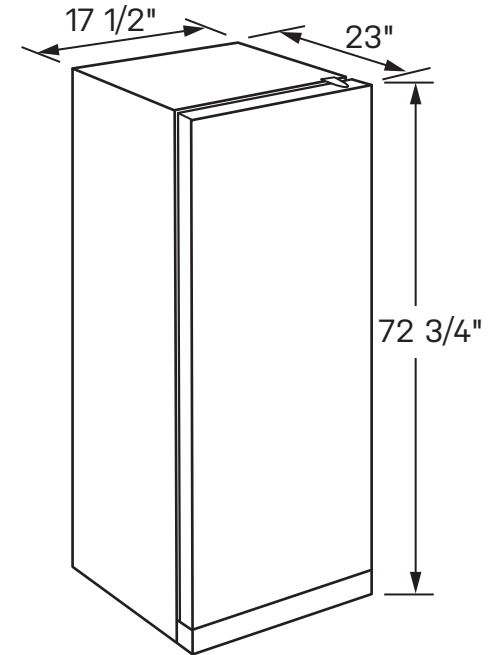

For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.

Specification Revised 6/25

PFH18HSPVMC

GE Profile™ Steam Closet with Fabric Refresh

FEATURES AND BENEFITS

Refresh and Dewrinkle – The GE Profile™ Steam Closet uses the gentle power of steam to penetrate deep into clothing fibers to refresh garments and help remove wrinkles.

Remove Tough Odors – Steam technology reduces odors that cling to shirts, jackets, shoes and common household fabrics, saving a trip to the dry cleaners.

Steam Sanitize – Sanitize and reduce at least 99% of bacteria and fungi in textiles and garments with innovative laundry technology that works to deeply refresh fibers.

Gentle Drying System – The heat pump system dries at lower temperatures and without harsh tumbling, delivering a gentle dry cycle to your most cherished garments.

Quiet by Design – This laundry steam closet is quiet by design and can be placed anywhere in your home.

Pants Creaser – A dedicated door panel is designed to maintain pants creases.

Fewer Trips To The Dry Cleaners – Reduce the need for dry cleaning by refreshing seasonal clothing or adding a gentle scent to your favorite fabrics at home in just a few minutes.

Gliding Hanger System – Hangers glide from side to side, improving air circulation and ensuring steam penetrates fabrics evenly for wrinkle reduction.


Easy Installation & No Plumbing – Removable water reservoirs are engineered to easily fill and drain. Plus only a standard 120v is needed for installation, making the steam closet compatible to be used in any room of your home.

Mirrored Carbon Finish – Reflective glass door finish is as beautiful as it is functional. The sleek design is complementary to any room it's added.

Smart Features Powered by SmarthQ™ – Mobile monitoring with SmarthQ makes it easy to check time remaining and the status of your Steam Closet from anywhere.

Coat or Towel Warmer – The steam closet is engineered to double as a convenient place to warm coats and towels.

Reversible Door – Door swing can be reversed using door reversing kit PFA18REWV (sold separately).

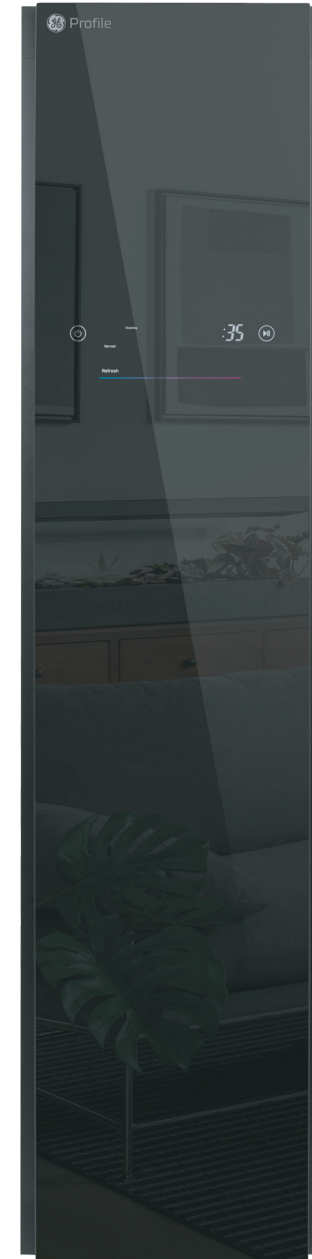

For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.

Specification Revised 6/25

GE® 5.0 cu. ft. Capacity Front Load ENERGY STAR® Steam Washer with SmartDispense™ and UltraFresh Vent System with OdorBlock™

GE® 5.0 cu. ft. Capacity Front Load

ENERGY STAR® Steam Washer with SmartDispense™ and UltraFresh Vent System with OdorBlock™

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

ELECTRIC RATING


120V	11.0A, 60Hz
------	-------------

INSTALLATION INFORMATION:


For complete information, see installation instructions packed with your washer.

INCLUDED:

- Power cord - up to 66" length
- Drain hose - up to 60" length

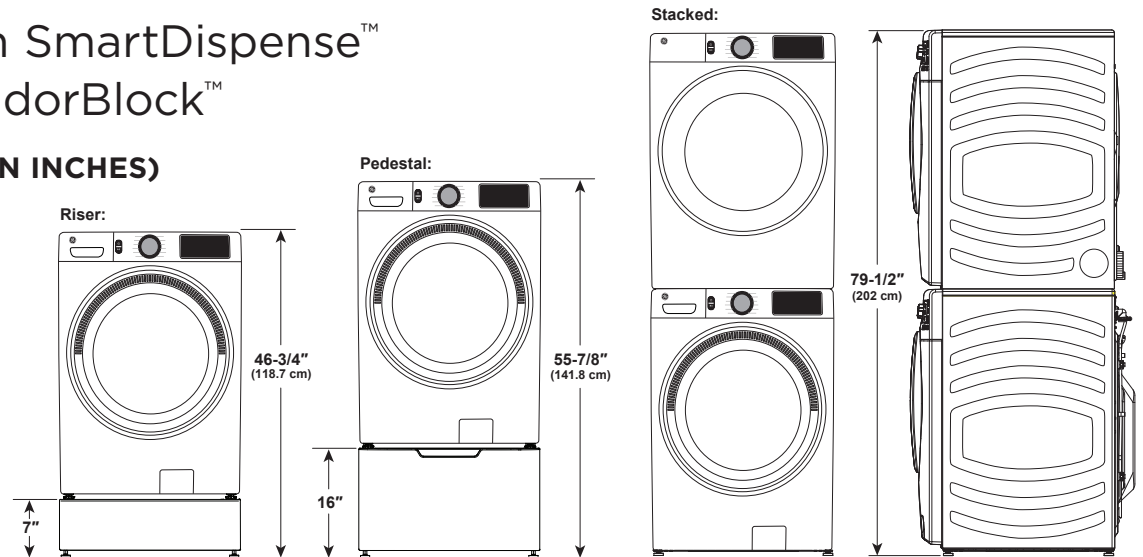

ADA Compliant

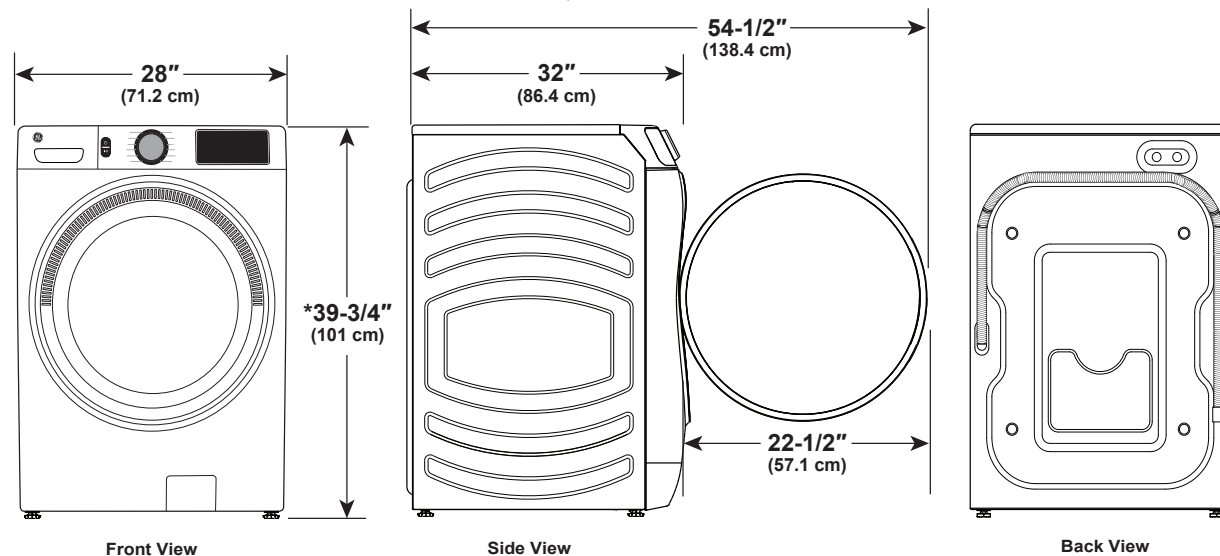

*With leveling legs retracted:
39-3/4" (101 cm).
With leveling legs fully extended:
40-5/8" (103.1 cm).



For answers to your Monogram, GE Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 6/23

GE® 5.0 cu. ft. Capacity Front Load ENERGY STAR® Steam Washer with SmartDispense™ and UltraFresh Vent System with OdorBlock™

GE® 5.0 cu. ft. Capacity Front Load ENERGY STAR® Steam Washer with SmartDispense™ and UltraFresh Vent System with OdorBlock™

SPECIAL INSTALLATION REQUIREMENTS:

STACKED INSTALLATION:

-Brackets for stacking dryer over washer are not included with the washer. Order part no. GFA28KITN.

ALCOVE OR CLOSET INSTALLATION:

-If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.

-The dryer MUST be exhausted to the outside.

-Minimum clearances between dryer cabinet and adjacent walls or other surfaces are: 0" all sides and top.*

-Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.

-No other fuel-burning appliance shall be installed in the same closet with a gas dryer.

BATHROOM OR BEDROOM INSTALLATION:

-The dryer MUST be exhausted to the outdoors.

-The installation must conform with the local codes, or in the absence of local codes, with the National Electric Code and National Fuel Gas Code, ANSI Z223.

MINIMUM CLEARANCE OTHER THAN ALCOVE OR CLOSET INSTALLATIONS:

-Minimum clearances to combustible surfaces 0" all sides and top.*

FOR MORE INFORMATION ON VENTING KITS AND ACCESSORIES, PLEASE CALL 1-800-GE-CARES.

*For improved performance, a 1/2" clearance is suggested on each side.

**Accessories sold separately.

WEIGHT

-Carton weight 255.7 lbs.

-Product weight 246 lbs.

ACCESSORIES**

GE Part Number	Description
WR97X27706	Touch-up Paint (Carbon Graphite) .06 oz.
WB64X5025	Touch-up Paint (White) .06 oz.
WH49X316	Drain Hose Extension
PM7X2	Universal Low-Profile Floors Tray (White)
WX17X10001CA	Vibration Pads
WH41X10207	Fill Hose
GFP1528SNWW	Pedestal Accessory (White)
GFP1528PTDS	Pedestal Accessory (Carbon Graphite)
GFR0728SNWW	Riser (White)
GFR0728PTDS	Riser (Carbon Graphite)
GFA28KITN	Stacking Kit

WARRANTY

Labor Warranty	Limited 1-year entire appliance
Parts Warranty	Limited 1-year entire appliance Limited 10-year motor



For answers to your Monogram, GE Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 6/23

GE® 5.0 cu. ft. Capacity Front Load ENERGY STAR® Steam Washer with SmartDispense™ and UltraFresh Vent System with OdorBlock™

GE® 5.0 cu. ft. Capacity Front Load ENERGY STAR® Steam Washer with SmartDispense™ and UltraFresh Vent System with OdorBlock™

FEATURES AND BENEFITS

UltraFresh Vent System with OdorBlock™ – The first and only UltraFresh Vent System with OdorBlock™ eliminates excess moisture to help prevent odors ensuring your washer stays fresh and clean.

Microban® Antimicrobial Technology – Built into components including the gasket, dispenser and draining system delivers protection that lives on load after load.

SmartDispense™ Technology – Save time and make laundry effortless with an intelligent dispenser that holds up to 32 loads of detergent and automatically dispenses the right amount each time.

Built-in WiFi – Start, stop and monitor your laundry from anywhere while receiving real-time notifications and updates.

Dynamic Balancing Technology (dBT™) – Our patented, time saving technology senses and re-balances uneven loads during the spin cycle, providing a quiet wash.

Reversible Door – Easily reverse your washer and dryer door for superior installation flexibility.

Quick Wash Cycle – Provides a fast 20 minute wash for lightly soiled items.

Sanitize + Allergen – Industry-first cycle sanitizes fabrics to kill 99% of common bacteria and allergens such as dust mites.

Steam Cycles – Safely penetrates deep into fabric fibers, loosening stains to deliver enhanced cleaning performance.

Dryer Control™ – When units are stacked, turn on and control your dryer settings right from your washer's control panel, eliminating the need to reach the dryer's control panel.

More Water Option – For bulky items like a king-sized comforter or for heavily soiled loads, this option adds up to an additional 3 gallons of water for a deep water wash and rinse.

Shallow Depth – Never compromise on convenience with this 32" shallow depth washer that easily fits into tight spaces like an alcove or closet, making it a suitable solution for homes of any size.

Time Saver – When you need to get a full load of clothes clean in only 37 minutes.

My Settings – Store preferred dry cycle settings for later use, maximize time and alleviate adjusting cycle preferences with every load.

Model GFW655SSVWW – White

Model GFW655SPVDS – Carbon Graphite



For answers to your Monogram, GE Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



GFD65ESSVWW / GFD65ESPVDS

GE® 7.8 cu. ft. Capacity Front Load Electric Dryer with Steam

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)



ELECTRIC DRYER RATING	
120V/240V	5600W, 25A, 60Hz
120V/208V	4300W, 23A, 60Hz

EXHAUST OPTIONS: 4-way via rear, left, right, and bottom. (The right, left, and bottom venting options require Side Vent Kit: GFA28DSVN)

CIRCUIT REQUIREMENTS: An individual, properly grounded branch circuit, protected by a 30-amp circuit breaker or a time-delay fuse, is required.

NOTE: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

INSTALLATION INFORMATION: For complete information, see installation instructions packed with your dryer.

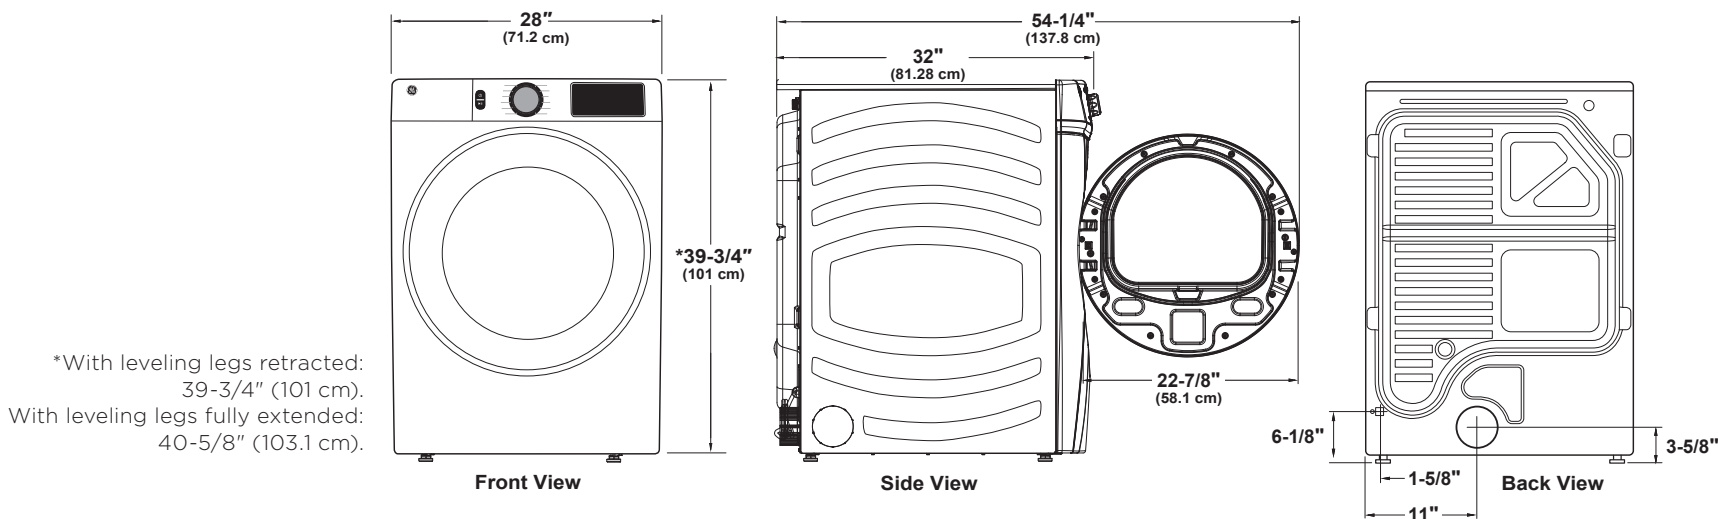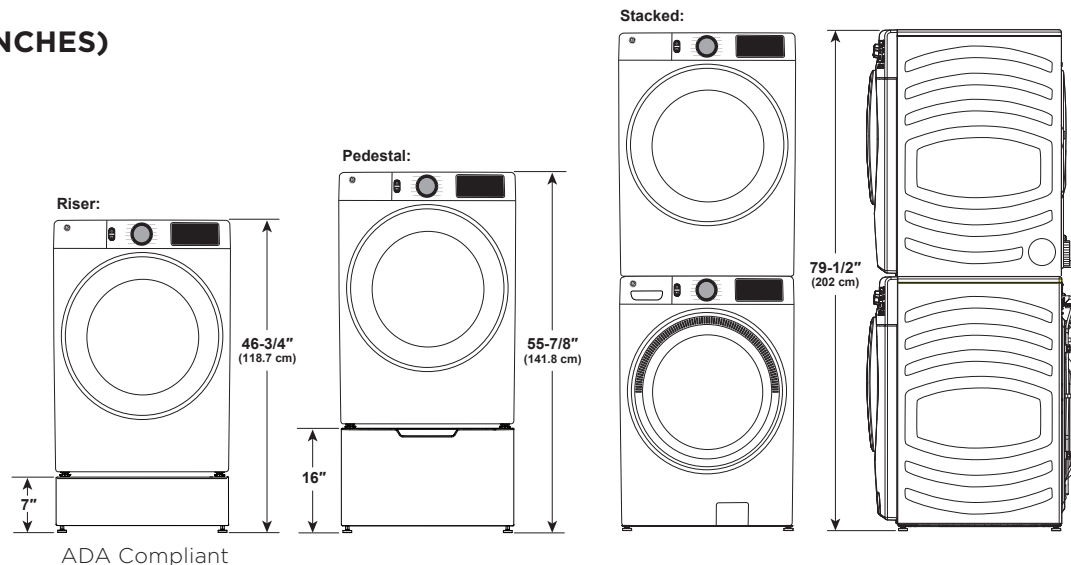

For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 6/23

GFD65ESSVWW / GFD65ESPVDS

GE® 7.8 cu. ft. Capacity Front Load Electric Dryer with Steam

SPECIAL INSTALLATION REQUIREMENTS:

STACKED INSTALLATION:

Brackets for stacking dryer over washer are not included with the dryer. Order part no. GFA28KITN.

ALCOVE OR CLOSET INSTALLATION:

If your dryer is approved for installation in an alcove or closet, it will be label on the dryer back.

The dryer MUST be exhausted to the outside.

Minimum clearances between dryer cabinet and adjacent walls or other surfaces are: 0" all sides and top.*

Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.

No other fuel-burning appliance shall be installed in the same closet with a gas dryer.

BATHROOM OR BEDROOM INSTALLATION:

The dryer MUST be exhausted to the outdoors.

The installation must conform with the local codes, or in the absence of local codes, with the National Electric Code and National Fuel Gas Code, ANSI Z223 for gas dryers.

MINIMUM CLEARANCE OTHER THAN ALCOVE OR CLOSET INSTALLATIONS:

Minimum clearances to combustible surfaces 0" all sides and top.*

FOR MORE INFORMATION ON VENTING KITS AND ACCESSORIES, PLEASE CALL 1-800-GE-CARES.

*For improved performance, a 1/2" clearance is suggested on each side.

**Accessories sold separately.

WEIGHT

-Carton weight 142 lbs.

-Product weight 132 lbs.

DRYER ACCESSORIES**

GE Part Number	Description
WB64X5025	Touch-up Paint (White) .06 oz.
WR97X27706	Touch-Up Paint (Carbon Graphite) - 0.6 oz
WE02X29449	Dryer Rack Assembly
GFA28DSVN	Side Vent Kit
WH41X10207	Inlet Hose
WX17X10001CA	Vibration Pads
GFP1528SNWW	Pedestal Assembly (White)
GFP1528PTDS	Pedestal Assembly (Carbon Graphite)
GFR0728SNWW	Riser (White)
GFR0728PTDS	Riser (Carbon Graphite)
GFA28KITN	Stacking Kit

WARRANTY

Labor Warranty	Limited 1-year entire appliance
Parts Warranty	Limited 1-year entire appliance Limited 10-year motor



For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 6/23

GFD65ESSVWW / GFD65ESPVDS

GE® 7.8 cu. ft. Capacity Front Load Electric Dryer with Steam

DRYER EXHAUSTING INFORMATION -METAL DUCT ONLY

For complete information, see installation instructions packed with your dryer.

DUCTING MATERIALS: For best performance, this dryer should be vented with 4" diameter all rigid metal exhaust duct. If rigid metal duct cannot be used, then UL-listed flexible metal (semi-rigid) ducting can be used (Kit WX08X10077). In special installations, it may be necessary to connect the dryer to the house vent using a flexible metal (foil-type) duct. A UL-listed flexible metal (foil-type) duct may be used **ONLY** in installations where rigid metal or flexible metal (semi-rigid) ducting cannot be used **AND** where a 4" diameter can be maintained throughout the entire length of the transition duct. Please see installation instruction packed with your dryer for complete instructions when using flexible metal (foil type) ducting.

EXHAUST LENGTH CALCULATION:

1. Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.
2. The maximum length of 4" rigid (aluminum or galvanized) duct which can be tolerated is shown in the table.

A turn of 45° or less may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow.


A turn over 45° should be treated as a 90° elbow.

Dryers must be exhausted to the outside.


CAUTION: For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard.

Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down.

FOR MORE INFORMATION ON VENTING KITS AND ACCESSORIES, PLEASE CALL 1-800-GE-CARES.



Best performance			
Maximum length of 4" dia. rigid metal duct			
Exhaust hood type			
Domestic dryer models	Number of 90° turns	A 4" opening	B 2-1/2" opening
		0	90 ft.
		1	60 ft.
		2	45 ft.
		3	35 ft.
		4	25 ft.

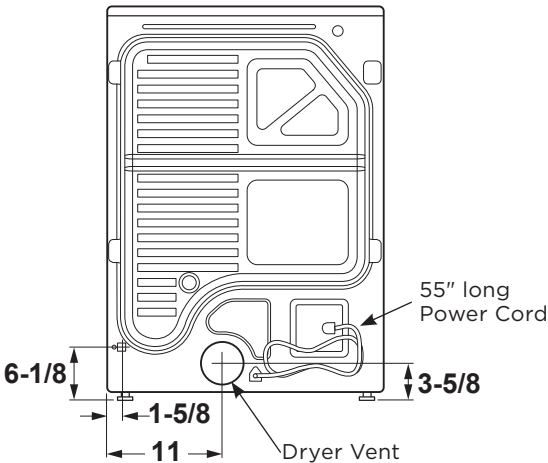

For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



GFD65ESSVWW / GFD65ESPVDS

GE® 7.8 cu. ft. Capacity Front Load Electric Dryer with Steam

FEATURES AND BENEFITS

Powersteam – Refresh small loads and dewrinkle larger loads with the power of steam.

Built-in WiFi – Start, stop and monitor your laundry from anywhere while receiving real-time notifications and updates.

Quick Dry – Quickly dries items and small loads for families on the go.

Reduce Static – Prevents static cling with a gentle mist near the end of the cycle.

Sanitize Cycle – Sterilize clothing with elevated temperatures designed to kill common household bacteria.

Wrinkle Care – Prevents wrinkles by extending the tumble without heat.

Damp Alert – Signals when delicate clothes reach the ideal dampness level for ironing or final air drying.

Vent Sensor – Provides alerts when a restriction is detected in your dryer vent.

4 Way Venting – Easy-to-change venting options provide the ultimate installation flexibility to fit in your home.

Shallow Depth – Never compromise on convenience with this 32" shallow depth unit that easily fits into tight spaces like an alcove or closet, making it a suitable solution for homes of any size.

Reversible Door – Easily reverse your washer and dryer door for superior installation flexibility.

My Settings – Store preferred dry cycle settings for later use, maximize time and alleviate adjusting cycle preferences with every load.

Model GFD65ESSVWW – White

Model GFD65ESPVDS – Carbon Graphite



4-way Venting Option



For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



DF48650G/S/P



FEATURES

Make a statement with your choice of range colors and finishes for your Wolf Dual Fuel Range—classic stainless or new powder-coated black or white

Patented dual-stacked, sealed burners offer precise temperature adjustment

Burners produce up to 20,000 Btu for fast boils and intense sears and as low as 300 Btu for true simmers and melts

Wolf's Dual VertiFlow™ convection system provides reliably even heat, reduces hot and cold spots, and enables consistent multi-rack cooking

Take the guesswork out of cooking with 10 chef-created cooking modes, including Bake, Broil, Convection, Convection Roast, Dehydrate, Gourmet, Proof, Roast, Stone, and Warm

The redesigned 15,000 Btu griddle features even, precise heat, handling breakfast with equal finesse as seared proteins and stir-fried vegetables

The full-color touchscreen is intuitive and easy to read, discreetly hiding away when not in use

LED backlit control bezels illuminate when in use, indicating which burners are active

Control your oven from wherever you are using our convenient Owner's App—remotely preheat, adjust temperatures, select modes, and more

ACCESSORIES

11" Cutting Board

18" Black Accessory Door Kit

18" Stainless Accessory Door Kit

18" White Accessory Door Kit

2-Burner Wok Grate

30" Black Accessory Door Kit

30" Multifunction Pan

30" Premier Baking Sheet

30" Stainless Door Kit

30" White Accessory Door Kit

48" and 60" Dual Fuel Brushed Brass Bezel Kit

Bake Stone Kit

Ball-Bearing Oven Racks

Broiler Pan and Rack Sets

Dehydration Rack Sets

Griddle Cleaning Kit

Griddle Cleaning Pads

Griddle Cleaning Solution

Standard Oven Racks

Temperature Probe

Accessories available through an authorized dealer.


For local dealer information, visit subzero-wolf.com/locator.



KNOB OPTIONS



TOP CONFIGURATION

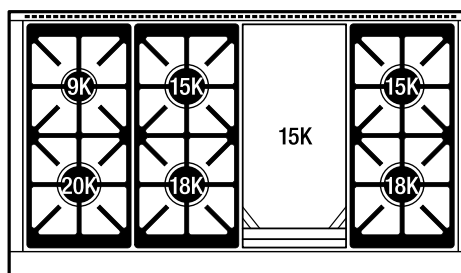

RANGETOP SPECIFICATIONS


- 1 - 9,200 Btu burner
- 2 - 15,000 Btu burners
- 2 - 18,000 Btu burners
- 1 - 20,000 Btu burner
- 1 - 15,000 Btu (14,000 Btu LP) griddle




PRODUCT SPECIFICATIONS

Model	DF48650G/S/P
Dimensions	47 7/8"W x 36 1/2"H x 29 1/2"D
Oven 1 Interior Dimensions	25 1/4"W x 17 1/2"H x 20"D
Oven 2 Interior Dimensions	13 1/4"W x 17 1/2"H x 19 3/4"D
Oven 1 Usable Capacity	1.8 cu. ft.
Oven 1 Overall Capacity	2.7 cu. ft.
Oven 2 Usable Capacity	3.2 cu. ft.
Oven 2 Overall Capacity	5.1 cu. ft.
Door Clearance	21"
Electrical Supply	240/208 VAC, 60 Hz
Electrical Service	50 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT female

ELECTRICAL




GAS




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

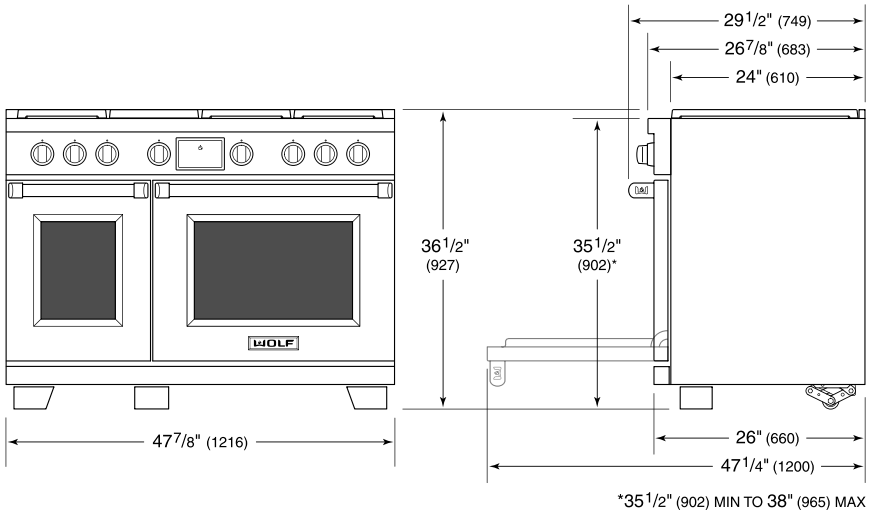

STANDARD INSTALLATION

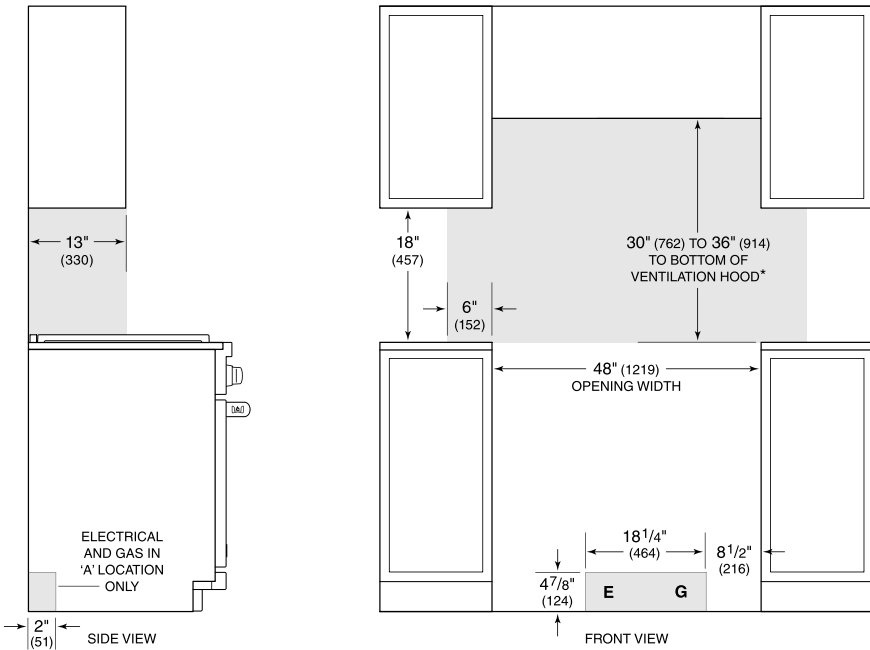

**Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials, 44" (1118) for charbroiler.*

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.



HBN5 Series

Technology



True iQ Blower System, powered by TrueCFM technology, guarantees performance with automatic, real-time calibration; 620 or 1240 TrueCFM



Detects heat from the cooktop and automatically adjusts fan speed based on heat as well as humidity and VOC pollutants



Wi-Fi, Bluetooth and voice activation capabilities enable hands-free operation



Code Ready Technology® can limit airflow to 300, 400 or 600 CFM to comply with local make-up air code requirements



EZ Install bracket system allows for simplified installation

Features

- Less than 0.3 sones at low speed with True iQ Blower System
- Correlated Color Temperature (CCT) technology allows users to match range hood lighting with kitchen lighting from 2700K to 5000K



Compatible with the BEST Kitchen Mobile App

best®


PERFORMANCE THAT INSPIRES

At **BEST**, we make high-performance range hoods that perform beautifully. Astonishingly quiet. Impressively effective. Remarkably efficient. And perfectly suited for the most distinguished kitchens.

Whether it's the centerpiece of the room or letting its surroundings shine, **BEST** is where high-end performance inspires.

Installation height above the cooking surface: 24"-30" *

Dimensions shown in inches.

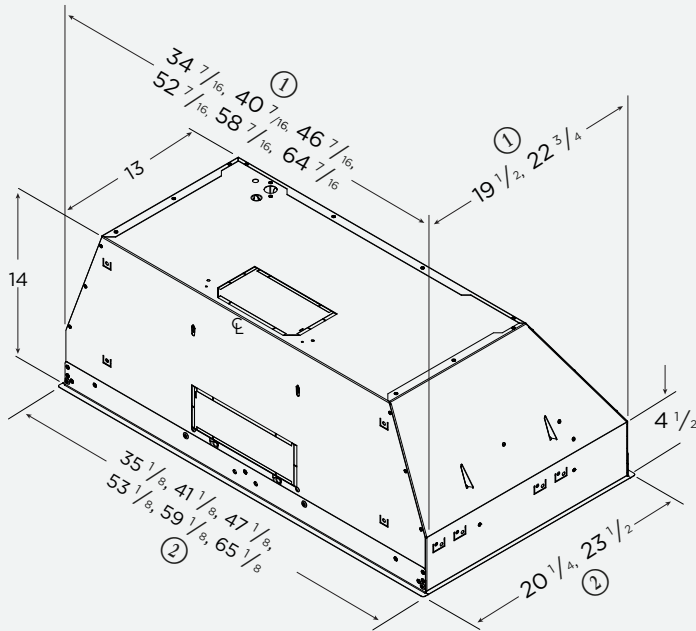

Note: Specification drawing dimensions and cutout dimensions assume the use of all four trims around the unit. For units manufactured before February 2026, only front and back trims can be removed. For units manufactured February 2026 or later, all trims can be removed.

① Top width and depth measurements on the specification drawing include the screws/rivets that hold the trims in place.

② Bottom width and depth measurements on the specification drawing include the trims and indicate the true width and depth of the entire unit.

* Exceeding 30" installation height is the installer's choice and may result in reduced capture.



If needed, ask a recommended installer to limit discharge to 300, 400 or 600 CFM.

HOOD SIZES*

Internal Blower, Single - Depth: 20 1/4"

36" HBN53696SS

Internal Blower, Dual - Depth: 20 1/4"

36" HBN536912SS

42" HBN542912SS

48" HBN548912SS

Internal Blower, Dual - Depth: 23 1/2"

36" HBN536212SS

48" HBN548212SS

54" HBN554212SS

60" HBN560212SS

66" HBN566212SS

* For exact dimensions, please refer to installation, use and care instructions.

FEATURES

Finish	Brushed Stainless Steel (Grade 430)
Lighting Type	LED Modules (6W per module)
Number of Modules	2 (36" to 48" hoods) 4 (54" to 66" hoods)
Lighting Levels	8
Light Modules Included	Yes
Correlated Color Temperature (CCT)	8 color temperature options from 2700K to 5000K (more options in the BEST Kitchen app)
Control Type	8-speed Capacitive Touch Slider
Control Features	Heat Sentry™, Delay-off, Wi-Fi/Bluetooth Connectivity, Voice Control, SmartSense Pro, Filter Clean Reminder
Remote Control	BEST Kitchen app
Filter Type	Hybrid Baffle
Non-ducted Capability	No

HOOD BLOWER INCLUDED

TrueCFM	620 CFM (HBN53696SS) 1240 CFM (other models)
---------	---

ACCESSORIES

ADA Kit	HAWRK5
Universal MUA Damper	MD8TU or MD10TU
Power Cord Kit	HCK44

INSTALLATION REQUIREMENTS

Amps @ 120V	5 (HBN53696SS) 7.5 (other models)
Electrical Connection	Direct Wire
Duct Size & Direction	8" round vertical or 3 1/4" x 10" rectangular horizontal (HBN53696SS) 10" round vertical (other models)
Backdraft Damper	Included

HBN5 SERIES CUTOUT DIMENSIONS

Model	Cutout W x D
HBN53696SS	34 1/2"W x 19 5/8"D
HBN536912SS	34 1/2"W x 19 5/8"D
HBN536212SS	34 1/2"W x 22 7/8"D
HBN542912SS	40 1/2"W x 19 5/8"D
HBN548912SS	46 1/2"W x 19 5/8"D
HBN548212SS	46 1/2"W x 22 7/8"D
HBN554212SS	52 1/2"W x 22 7/8"D
HBN560212SS	58 1/2"W x 22 7/8"D
HBN566212SS	64 1/2"W x 22 7/8"D

Note: Cutout dimensions shown are for reference only. Slight alterations may be required. It is recommended to cut out the cabinet or build the enclosure at the time the unit is received to ensure a proper fit. For standard retrofit applications, HBN5 units should fit into existing cutouts of discontinued CP5 units. The height of HBN5 units is 14", which is 3" more than CP5 units.

HVI PERFORMANCE

Single Blower

	SONES							
Speed	1 (0.01 in. w.g.)	2*	3*	4*	5*	6*	7*	8 (0.1 in. w.g.)
8" round Vertical	< 0.3	< 0.3	0.4	1.4	3.0	4.0	6.5	8.5
3 3/4" x 10" Horizontal	< 0.3	0.4	1.0	2.0	4.0	5.0	7.5	10

	CFM							
Speed	1 (0.01 in. w.g.)	2*	3*	4*	5*	6*	7*	8 (0.25 in. w.g.)
8" round Vertical	120	150	190	260	340	400	520	600
3 3/4" x 10" Horizontal	110	140	190	260	340	400	500	590

Dual Blower


	SONES							
Speed	1 (0.01 in. w.g.)	2*	3*	4*	5*	6*	7*	8 (0.1 in. w.g.)
10" round Vertical	< 0.3	0.3	1.0	2.5	4.5	5.5	8.5	11.5

	CFM							
Speed	1 (0.01 in. w.g.)	2*	3*	4*	5*	6*	7*	8 (0.25 in. w.g.)
10" round Vertical	200	320	410	560	730	830	1040	1235


* Where noted performance rating is not HVI certified.

AIRFLOW PERFORMANCE

Single Blower

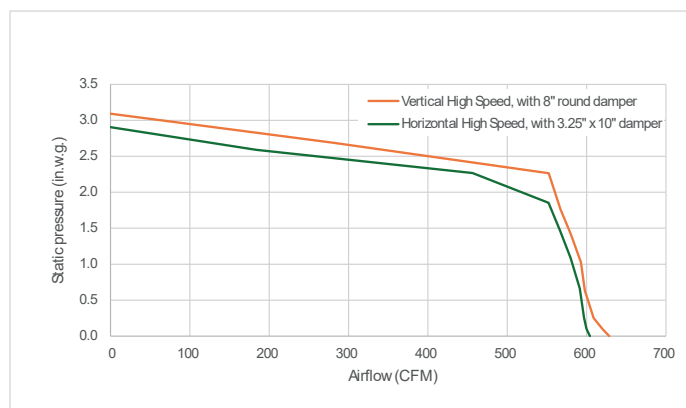

Dual Blower

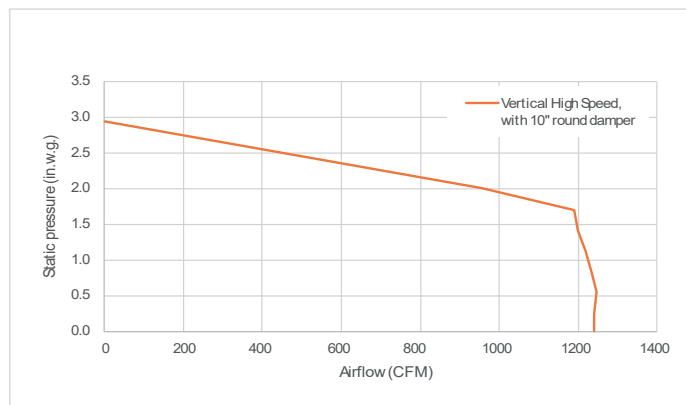

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at .01 in. and 0.25 in. static pressure at high speed based on tests conducted in an HVI-approved state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.



USA: Hartford, Wisconsin, 53027, bestrangehoods.com
CANADA: Drummondville, QC, J2C 7W9, bestrangehoods.ca

1117503C 02/26





Série HBN5

Technologie



Le système de ventilation True iQ assure des performances avec une calibration automatique en temps réel à 620 ou 1240 TrueCFM



Détecte la chaleur provenant de la surface de cuisson, et ajuste automatiquement la vitesse du ventilateur en fonction de la température, de l'humidité et des polluants COV



Wi-Fi, Bluetooth et la fonction de commande vocale permettent un fonctionnement mains libres



Le Code Ready Technology® peut limiter le débit d'air à 300, 400 ou 600 pi³/min afin de se conformer aux codes locaux ou aux exigences en apport d'air.



Le système de supports d'installation EZ simplifie l'installation

Caractéristiques

- Niveau sonore inférieur à 0,3 sone à basse vitesse avec le système de ventilation True iQ
- La technologie de température de couleur corrélée (TCC) offre la possibilité d'assortir l'éclairage de la hotte à celui de la cuisine, dans une plage comprise entre 2700 K et 5000 K



Compatible avec l'application mobile BEST Kitchen

best®


LA PERFORMANCE QUI INSPIRE

Chez **BEST**, nous fabriquons des hottes de cuisinière haute performance qui fonctionnent à merveille. Étonnamment silencieuses. D'une puissance impressionnante. Remarquablement efficaces. Et parfaitement adaptées aux cuisines les plus distinguées.

Qu'il s'agisse de la pièce maîtresse ou qu'elle fasse briller son environnement, la hotte **BEST** inspire la performance haut de gamme.

Hauteur d'installation recommandée
au-dessus de la surface de cuisson: de 24 po à 30 po*

Les dimensions indiquées sont en pouces.

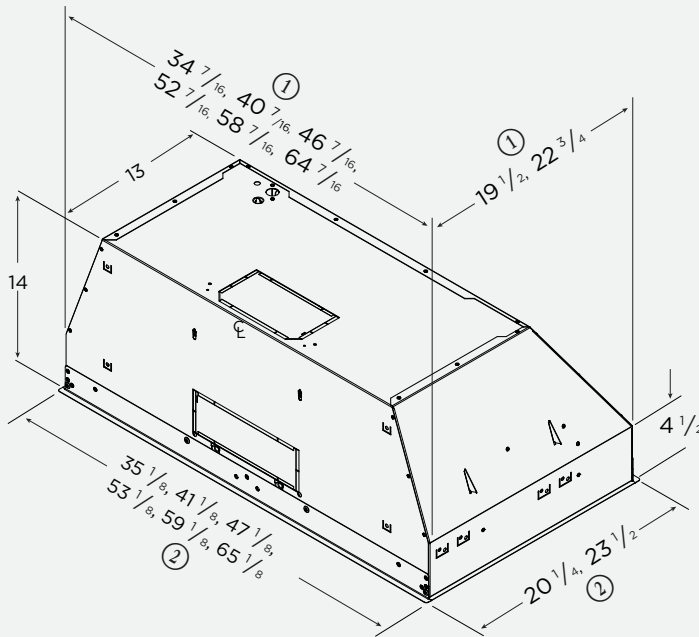

Note : Les dimensions ci-dessus prennent en compte l'utilisation des quatre bordures autour de la hotte. **Pour les unités fabriquées avant février 2026, seules les bordures avant et arrière peuvent être retirées. Pour les unités fabriquées depuis février 2026, toutes les bordures peuvent être retirées.**

- ① Les dimensions de largeur et de profondeur supérieures sur l'illustration comprennent les vis/rivets qui fixent les bordures.
② Les dimensions de largeur et de profondeur inférieures sur l'illustration comprennent les bordures et indiquent la largeur et la profondeur réelles de la hotte.

* Les distances supérieures à 30 po sont à la discrétion de l'utilisateur et pourraient réduire la performance de la hotte.

CR T
CODE READY
TECHNOLOGY
Si nécessaire, demander à un installateur recommandé pour limiter le débit d'air à 300, 400 ou 600 pi³/min.

DIMENSIONS*

Ventilateur interne simple - Profondeur : 20 1/4 po

36 po HBN53696SS

Ventilateur interne double - Profondeur : 20 1/4 po

36 po HBN536912SS

42 po HBN542912SS

48 po HBN548912SS

Ventilateur interne double - Profondeur : 23 1/2 po

36 po HBN536212SS

48 po HBN548212SS

54 po HBN554212SS

60 po HBN560212SS

66 po HBN566212SS

* Pour les dimensions exactes, veuillez vous référer aux instructions d'installation, d'utilisation et d'entretien.

CARACTÉRISTIQUES

Finis	Acier inoxydable brossé (Grade 430)
Type d'éclairage	Modules à DEL (6 W par module)
Nombre de modules	2 (hottes de 36 po à 48 po) 4 (hottes de 54 po à 66 po)
Intensités d'éclairage	8
Modules inclus	Oui
Température de couleur correlée (CCT)	8 options de température de couleur de 2700 K à 5000 K (plus d'options dans l'application mobile BEST Kitchen)
Type de commande	Capacitive à glisseur à 8 vitesses
Caractéristiques de la commande	Heat Sentry ^{MC} , fonction d'arrêt différé, connectivité Wi-Fi/Bluetooth, commande vocale, SmartSense Pro, indicateur d'entretien des filtres
Commande à distance	Application mobile BEST Kitchen
Type de filtres	Hybride à chicanes
Installation sans conduit	Non

VENTILATEUR INCLUS

TrueCFM	620 pi³/min (HBN53696SS) 1240 pi³/min (autres modèles)
---------	---

ACCESSOIRES

Ensemble ADA	HAWRK5
Dispositif d'apport d'air universel	MD8TU ou MD10TU
Ensemble de cordon d'alimentation	HCK44

EXIGENCES D'INSTALLATION

Intensité à 120 V:	5 A (HBN53696SS) 7,5 A (autres modèles)
Raccordement électrique	Direct
Dimensions du conduit et orientation	8 po rond verticale ou 3 1/4 po x 10 po rectangulaire horizontale (HBN53696SS) 10 po rond verticale (autres modèles)
Volet antiretour	Inclus

DIMENSIONS DE DÉCOUPE POUR LA SÉRIE HBN5

Modèle	Découpe l. x P.
HBN53696SS	34 1/2 po l. x 19 5/8 po P.
HBN536912SS	34 1/2 po l. x 19 5/8 po P.
HBN536212SS	34 1/2 po l. x 22 7/8 po P.
HBN542912SS	40 1/2 po l. x 19 5/8 po P.
HBN548912SS	46 1/2 po l. x 19 5/8 po P.
HBN548212SS	46 1/2 po l. x 22 7/8 po P.
HBN554212SS	52 1/2 po l. x 22 7/8 po P.
HBN560212SS	58 1/2 po l. x 22 7/8 po P.
HBN566212SS	64 1/2 po l. x 22 7/8 po P.

Note: Les dimensions de découpe présentées sont à titre de référence seulement. De légères altérations pourraient être requises. Il est recommandé d'effectuer la découpe de l'armoire ou de construire l'enceinte au moment de la réception de l'unité pour assurer un bon ajustement. Pour les remplacements standards, les hottes HBN5 devraient être ajustées selon les découpes existantes des hottes CP5 de fin de série. La hauteur des hottes HBN5 est de 14 po, soit 3 po de plus que les hottes CP5.

RENDEMENT HVI

Ventilateur simple

	SONES							
Vitesse	1 (0,01 po d'eau)	2*	3*	4*	5*	6*	7*	8 (0,1 po d'eau)
8 po rond vertical	< 0,3	< 0,3	0,4	1,4	3,0	4,0	6,5	8,5
3 ¹ / ₄ po x 10 po horizontal	< 0,3	0,4	1,0	2,0	4,0	5,0	7,5	10

PI ³ /MIN									
Vitesse	1 (0,01 po d'eau)	2*	3*	4*	5*	6*	7*	8 (0,25 po d'eau)	8 (0,1 po d'eau)
8 po rond vertical	120	150	190	260	340	400	520	600	620
3¼ po x 10 po horizontal	110	140	190	260	340	400	500	590	600

Ventilateur double


	SONES							
Vitesse	1 (0,01 po d'eau)	2*	3*	4*	5*	6*	7*	8 (0,1 po d'eau)
10 po rond vertical	< 0,3	0,3	1,0	2,5	4,5	5,5	8,5	11,5

PI ³ /MIN									
Vitesse	1 (0,01 po d'eau)	2*	3*	4*	5*	6*	7*	8 (0,25 po d'eau)	8 (0,1 po d'eau)
10 po rond vertical	200	320	410	560	730	830	1040	1235	1240


* Signifie que la donnée n'est pas certifiée par le HVI.

DÉBIT DE L'AIR (PI³/MIN)

Ventilateur simple

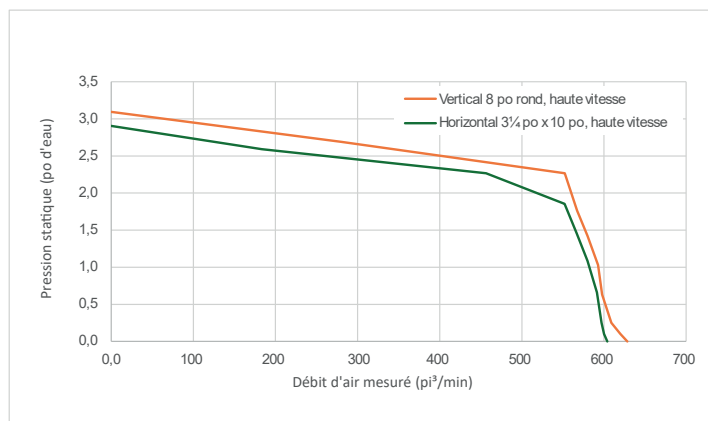

Ventilateur double

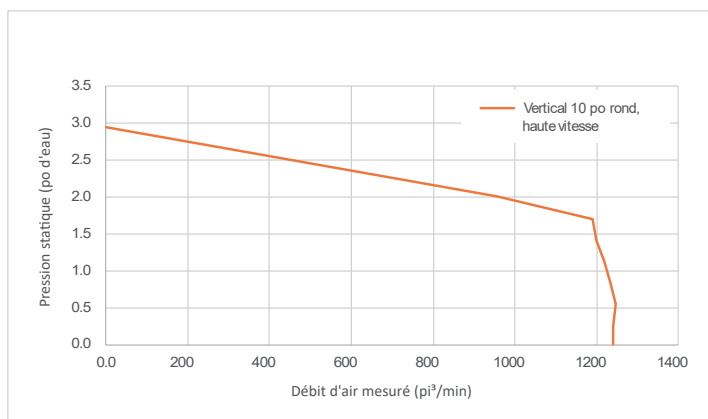

L'HOMOLOGATION HVI-2100 est conforme aux nouvelles techniques et procédures d'essai prescrites par le Home Ventilating Institute pour les produits d'emploi courant, dès leur disponibilité pour les consommateurs. Le rendement du produit est évalué à une pression statique de 0,1 po et de 0,25 po en haute vitesse, d'après les tests effectués dans un laboratoire d'essai ultra-perfectionné approuvé par le HVI. Le sone est une mesure de la perception humaine de la puissance sonore, d'après des mesures effectuées en laboratoire.



USA: Hartford, Wisconsin, 53027, bestrangehoods.com
CANADA: Drummondville, QC, J2C 7W9, bestrangehoods.ca

1117503C 02/26



DW2451



FEATURES

Cove's new advanced wash system drives three powerful spray arms, 45 spray jets, and a fine-mesh filter that removes food and grease and circulates clean water

Every glass, dish, and utensil comes out spotless and dry thanks to the hot rinse and fan assist

Whisper-quiet operation means you can keep the conversation flowing while running a load of dishes

Quality and aesthetics meet in a striking stainless-steel interior with a clean, fastenerless design

12 wash cycles and 6 add-on options can be mixed and matched, allowing you to personalize cleaning to your needs

Offers infinite interior variations to meet your dishwashing needs; height-adjustable middle rack and fold-down tines accommodate large pots and tall items

Loading and unloading is easy with interior LED lights that aid in visibility

Stainless or panel-ready options complement any décor and coordinate perfectly with other Sub-Zero and Wolf appliances

Dishwasher disappears into the kitchen with hidden control panel and discreet status light

With our convenient Owner's App, you can remotely start or monitor a cycle, receive alerts when rinse aid is low—even set up auto-replenishment

Cove's leak protection system offers peace of mind in the rare event of a leak. A conductivity sensor in the base of the unit will automatically stop a cycle in progress if it detects a leak

ACCESSORIES

4" Stainless Kickplate - 24" Opening

4" Stainless Kickplate - 60cm Opening

Pro Handle Kit

Tubular Handle Kit

24" Stainless Steel Door Panel Kits

60cm Stainless Steel Door Panel Kits

Accessories are available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



HANDLE ACCESSORIES

PRO



TUBULAR



PRODUCT DETAILS


DISHWASHER

- 4 LED lights (2 sides; 2 top)
- 45 spray jets across 3 spray arms
- Four-stage, fine mesh filter
- Adjustable stemware rail
- Adjustable cup shelf
- Height-adjustable middle rack
- Easy-glide bottom rack
- Upper silverware rack
- One large utensil basket
- Fold-down tines on lower and middle racks


PRODUCT SPECIFICATIONS

Model	DW2451
Dimensions	23 5/8"W x 34 1/2"H x 23 1/4"D
Door Clearance	26 3/4"
Sound Level	41 dBA (Model and cycle/option dependent)
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Receptacle	3-prong grounding-type
Cord Length	6'
Water Connection	5' braided tubing with 3/8" female compression fitting
Drain Connection	5' (1.5 m) corrugated tubing
Plumbing Pressure	30–140 psi

ELECTRICAL




PLUMBING



COVE OPENING WIDTH Cove dishwashers accommodate varying opening widths. A 23 5/8" (60 cm) width provides minimum reveals and is ideal for new construction. A 24" width is also common; however, reveals for a 24" opening will be larger than the reveals for a 23 5/8" opening unless the panel width is adjusted accordingly. 24" and 60 cm stainless steel panels are available and must be specified accordingly.


PANEL SPECIFICATIONS For complete panels specifications including width/height, weight requirements and thickness requirements visit subzero-wolf.com/reveal.

INTERIOR VIEW

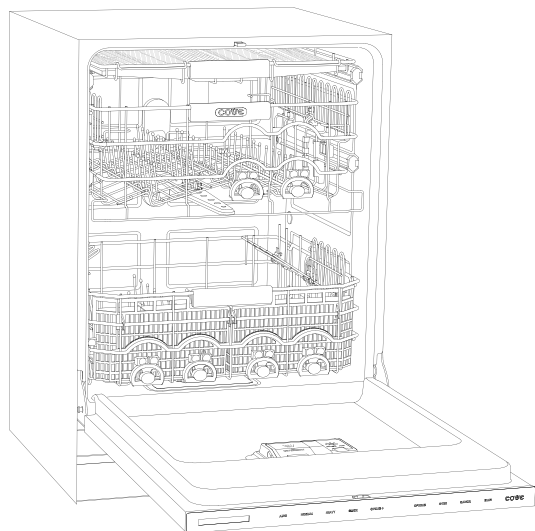


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.


DIMENSIONS

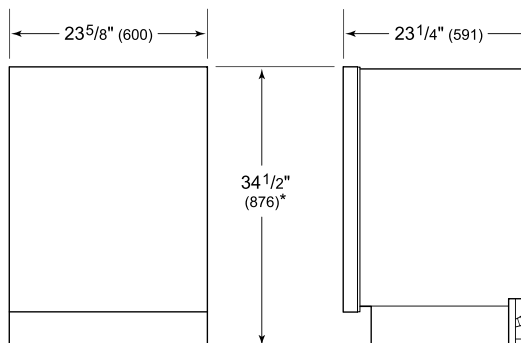


*33 3/4" (857) MIN TO 34 3/4" (883) MAX

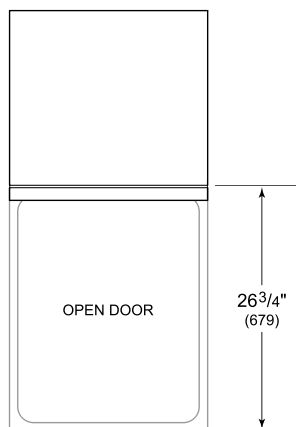

24" INSTALLATION

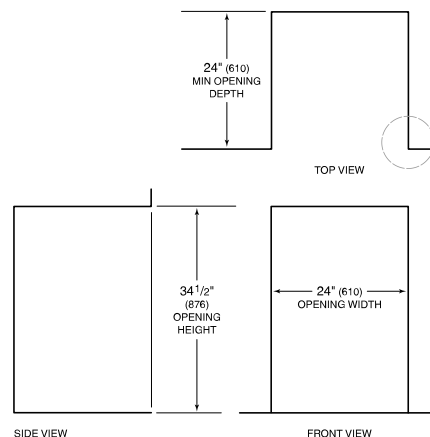

NOTE: 3 1/2" (89) finished returns will be visible and should be finished to match cabinetry.

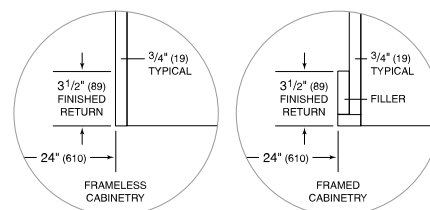

DEC3650FI



FEATURES

ClearSight® LED lighting system fully illuminates the interior and reduces shadows.

Sleek stainless accents trim the interior, matching the sophistication of the exterior

Easily customize settings with the tap of a finger via the conveniently accessible touch control panel

Night Mode optimizes the interior lighting based on the detected ambient light, reducing the brightness by 90% in dim environments

Position adjustable door shelves at various heights to accommodate assorted items

Fresh-tasting, filtered ice ready on demand; activate Max Ice Mode to temporarily increase ice production

Locks in cold air with a magnetic door seal system

Wi-Fi enabled for convenient remote access using your mobile device or smart home system

Sub-Zero offers an industry-leading full two-year warranty on appliances, along with a full five-year sealed system warranty

Accepts custom panels for an integrated look within cabinetry or stainless-steel accessory panels and handles to match other Sub-Zero, Wolf, and Cove products*

ACCESSORIES

Reduced Toekick Divider

Stainless Steel Side Panel

Water Filter

Dual Installation Kits

Stainless Steel Dual Installation Kickplates

Stainless Steel Door Panels With Pro Handle

Stainless Steel Door Panels With Tubular Handle

Stainless Steel Pro and Tubular Handles

Accessories are available through an authorized dealer. For local dealer information, visit subzero-wolf.com/locator.



HANDLE ACCESSORIES

PRO



TUBULAR



PRODUCT DETAILS


FREEZER

- LED freezer lights
- 4 freezer shelves (3 adjustable; 1 stationary)
- 5 adjustable freezer door bins
- 3 storage drawers, 2 with adjustable dividers
- Automatic ice maker with removable ice container


PRODUCT SPECIFICATIONS

Model	DEC3650FI
Dimensions	36"W x 84"H x 24"D
Freezer Capacity	19.4 cu. ft.
Weight	485 lbs
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Plumbing Supply	1/4" OD copper, braided stainless steel or PEX tubing
Plumbing Pressure	35–120 psi

ELECTRICAL



PLUMBING




NOTE: The electrical outlet must be positioned with the grounding prong to the right of the thinner blades.

PANEL SPECIFICATIONS For complete panels specifications including width/height, weight requirements and thickness requirements visit subzero-wolf.com/reveal.


NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

INTERIOR VIEW

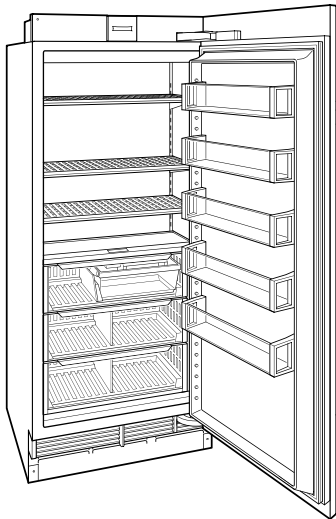


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

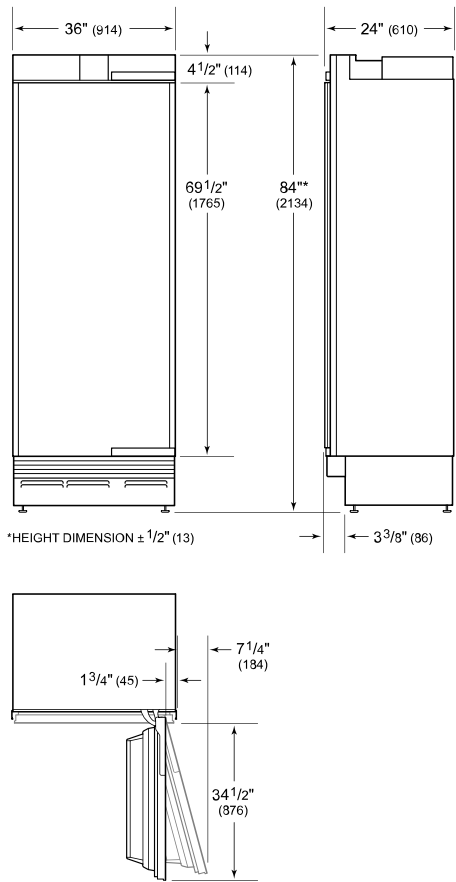

STANDARD INSTALLATION

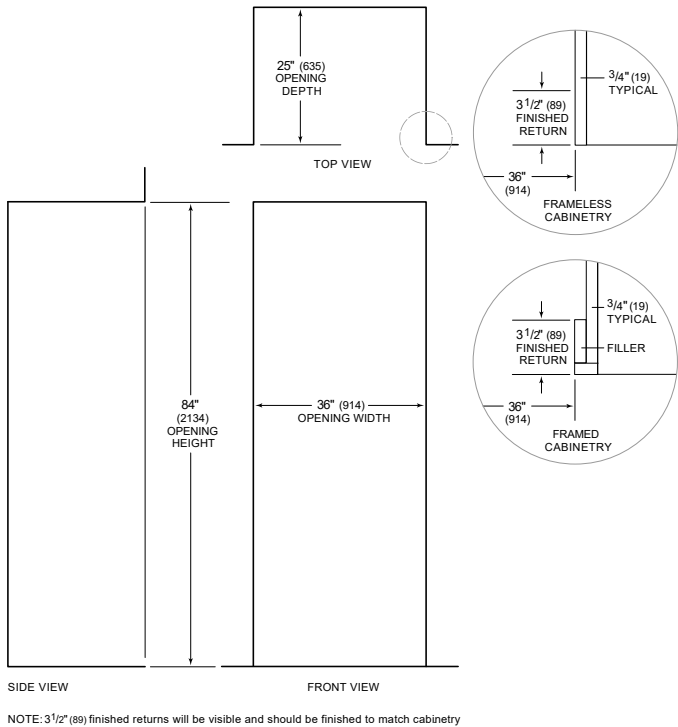

DEC3650R



FEATURES

Split Climate® intelligent cooling system revolutionizes Sub-Zero's already-superior preservation capabilities, keeping food even fresher for longer

ClearSight® LED lighting system fully illuminates the interior and reduces shadows.

Sleek stainless accents trim the interior, matching the sophistication of the exterior

Easily customize settings—from lighting to humidity—with the tap of a finger via the conveniently accessible touch control panel

Night Mode optimizes the interior lighting based on the detected ambient light, reducing the brightness by 90% in dim environments

Lift the base of the flip-up dairy compartment to store taller items on the shelf below

Position adjustable door shelves at various heights to accommodate assorted items

Nano coating lines the perimeter of each glass shelf to create a hydrophobic barrier that helps contain spills

The easily accessible NASA-inspired air purification system scrubs the air of ethylene and odour every 20 minutes

Wi-Fi enabled for convenient remote access using your mobile device or smart home system

Sub-Zero offers an industry-leading full two-year warranty on appliances, along with a full five-year sealed system warranty

Accepts custom panels for an integrated look within cabinetry or stainless-steel accessory panels and handles to match other Sub-Zero, Wolf, and Cove products*

ACCESSORIES

Air Purification Cartridge

Egg Container

Reduced Toekick Divider

Stainless Steel Side Panel

Dual Installation Kits

Stainless Steel Dual Installation Kickplates

Stainless Steel Door Panels With Pro Handle

Stainless Steel Door Panels With Tubular Handle

Stainless Steel Pro and Tubular Handles

Accessories are available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



HANDLE ACCESSORIES

PRO



TUBULAR



PRODUCT DETAILS


REFRIGERATOR

- LED refrigerator lights
- 4 glass refrigerator shelves (3 adjustable; 1 stationary)
- 4 soft-close crisper drawers with adjustable dividers
- 5 door bins (3 adjustable; 2 stationary)
- 1 flip-up dairy compartment

PRODUCT SPECIFICATIONS

Model	DEC3650R
Dimensions	36"W x 84"H x 24"D
Refrigerator Capacity	21.7 cu. ft.
Weight	485 lbs
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit

ELECTRICAL




NOTE: The electrical outlet must be positioned with the grounding prong to the right of the thinner blades.

PANEL SPECIFICATIONS For complete panels specifications including width/height, weight requirements and thickness requirements visit subzero-wolf.com/reveal.



NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

INTERIOR VIEW

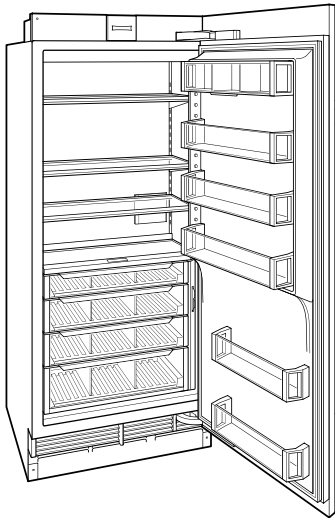


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

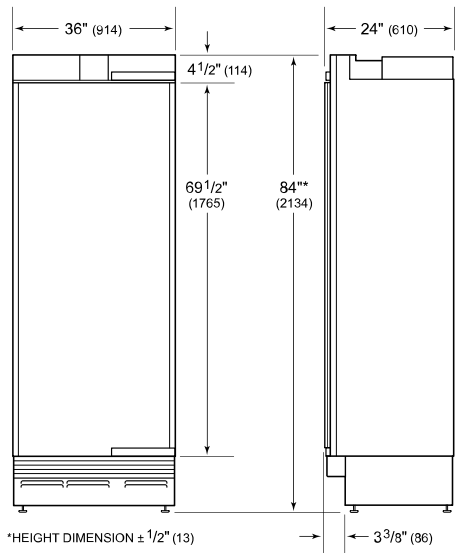

STANDARD INSTALLATION

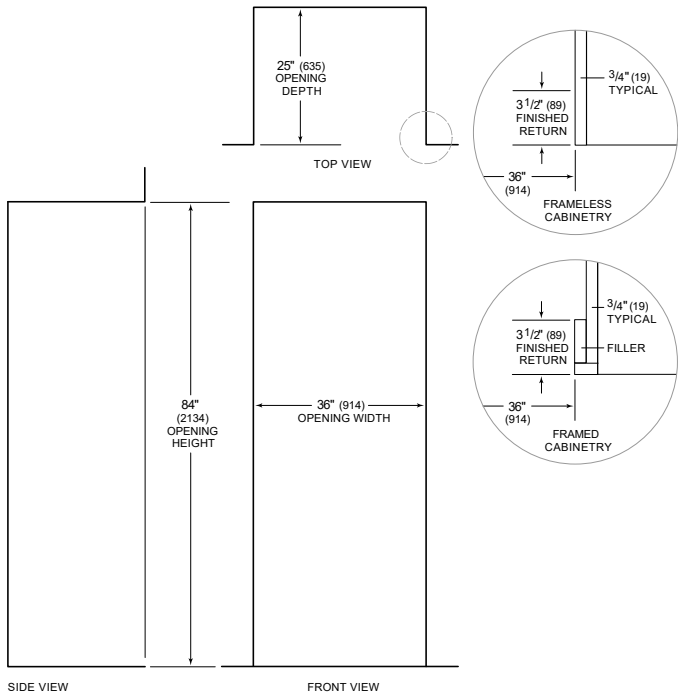

NOTE: 3 1/2" (89) finished returns will be visible and should be finished to match cabinetry

MD24TE/S

FEATURES

20% larger interior capacity

Classic stainless steel

Control panel lock

Installs standard or flush inset

10 power levels and sensor cooking for easy meals

"Keep Warm" mode

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison

ACCESSORIES

Air vent for flush inset installations

Accessories available through an authorized Sub-Zero dealer.
For local dealer information, visit subzero-wolf.com/locator.



DF36650/S/P



FEATURES

Make a statement with your choice of range colours and finishes for your Wolf Dual Fuel Range—classic stainless or new powder-coated black or white

Patented dual-stacked, sealed burners offer precise temperature adjustment

Burners produce up to 20,000 Btu for fast boils and intense sears and as low as 300 Btu for true simmers and melts

For improved temperature control and safety, the spark ignition system reignites burners automatically

Wolf's Dual VertiFlow™ convection system provides reliably even heat, reduces hot and cold spots, and enables consistent multi-rack cooking

Gourmet Mode features nearly 50 presets that automatically control the oven to ensure delicious results

Take the guesswork out of cooking with 10 chef-created cooking modes, including Bake, Broil, Convection, Convection Roast, Dehydrate, Gourmet, Proof, Roast, Stone, and Warm

The full-colour touchscreen is intuitive and easy to read, discreetly hiding away when not in use

LED backlit control bezels illuminate when in use, indicating which burners are active

The oven offers self-clean, delayed start, timed cook, and Sabbath features

The temperature probe alerts you when your dish has reached the desired temperature

Control your oven from wherever you are using our convenient Owner's App—remotely preheat, adjust temperatures, select modes, and more

ACCESSORIES

- 2-Burner Wok Grate
- 36" Dehydration Rack Set
- 36" Dual Fuel Brushed Brass Bezel Kit
- 36" Full-Extension Ball-Bearing Oven Rack
- 36" Multifunction Pan
- 36" Standard Oven Rack
- Bake Stone Kit
- Filler Trim
- Temperature Probe
- Red, black, brushed stainless, brushed brass, and brushed gray knob kits
- Rear Caster Covers
- Front Leg Extension Covers
- Stainless Steel Kickplates
- 5" and 10" stainless steel risers, and 20" riser with shelf
- Range Finish Kits


Accessories available through an authorized dealer.



KNOB OPTIONS



TOP CONFIGURATION

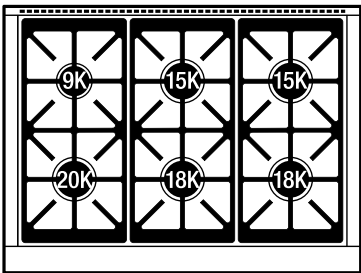

RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu burner
- 2 - 15,000 Btu burners
- 2 - 18,000 Btu burners
- 1 - 20,000 Btu burner
- Stainless-steel island trim




PRODUCT SPECIFICATIONS

Model	DF36650/S/P
Dimensions	35 7/8"W x 36 1/2"H x 29 1/2"D
Oven 1 Interior Dimensions	31 1/4"W x 17 1/2"H x 20"D
Oven 1 Usable Capacity	4.1 cu. ft.
Oven 1 Overall Capacity	6.3 cu. ft.
Door Clearance	21"
Electrical Supply	240/208 VAC, 60 Hz
Electrical Service	30 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT


ELECTRICAL

GAS

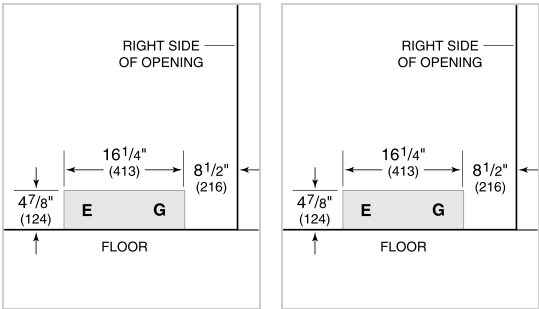


NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

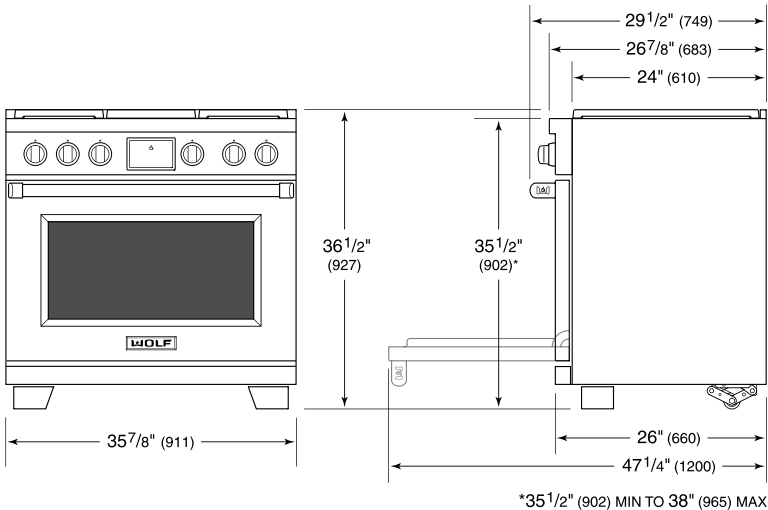

STANDARD INSTALLATION

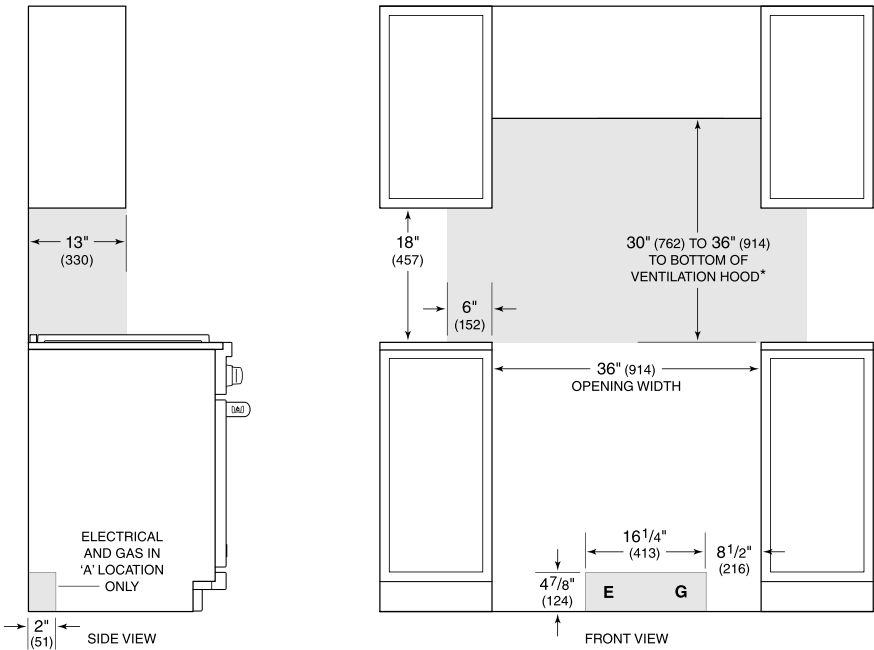

**Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials, 44" (1118) for charbroiler.*

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.

WWD30



FEATURES

Distributes heat evenly from 80 to 200 degrees Fahrenheit using fans

Includes food presets, such as bread, cooked cereals, and pizza

Tested and approved for warming towels

Fits entrées and sides easily in its generous 30 inch drawer cavity

Includes hidden electronic controls

Offers automatic shut-off

ACCESSORIES

30" Stainless Professional Front Panel - 2" Thick

36" Stainless Professional Front Panel - 2" Thick

6-Piece Container Set

Contemporary Handle- E Series

Contemporary/Transitional Handle

Professional Handle-E Series

Professional Handle-M Series

Transitional Handle- M Series

Warming Drawer Front Panel - Integrated

Warming Drawer Front Panels - M Series

Warming Drawer Front Panels - E Series

Accessories available through an authorized dealer.

For local dealer information, visit subzero-wolf.com/locator.



FRONT PANEL OPTIONS



30" E SERIES TRANSITIONAL



30" E SERIES PROFESSIONAL



30" E SERIES CONTEMPORARY



30" M SERIES CONTEMPORARY



30" M SERIES TRANSITIONAL



30" M SERIES CONTEMPORARY STAINLESS



30" M SERIES PROFESSIONAL



30" L SERIES



30" INTEGRATED


PRODUCT SPECIFICATIONS

Model	WWD30
Dimensions	29 7/8"W x 10 3/8"H x 22 3/4"D
Capacity	1.6 cu. ft.
Weight	75 lbs
Electrical Supply	120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Power Cord Length	3 Feet
Receptacle	3-prong grounding-type



INSTALLATION WITH FRONT PANEL Accessory front panels may affect overall product dimensions and opening dimensions. Refer to Reveal for more information: subzero-wolf.com/reveal

NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified


DIMENSIONS

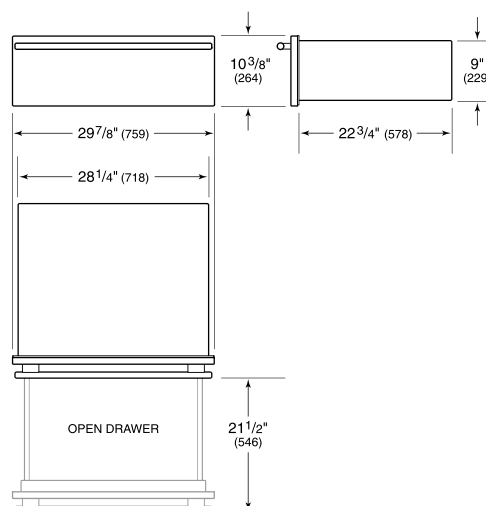

FLUSH INSTALLATION

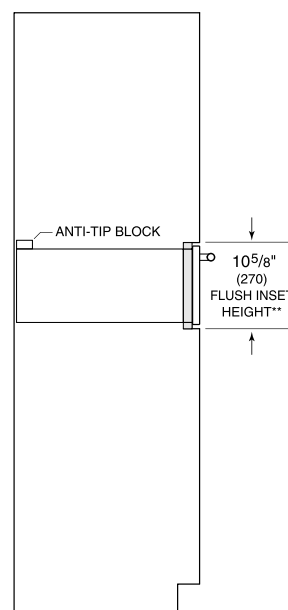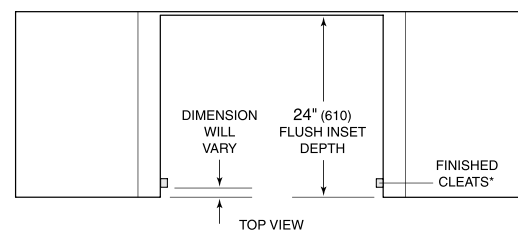

SIDE VIEW

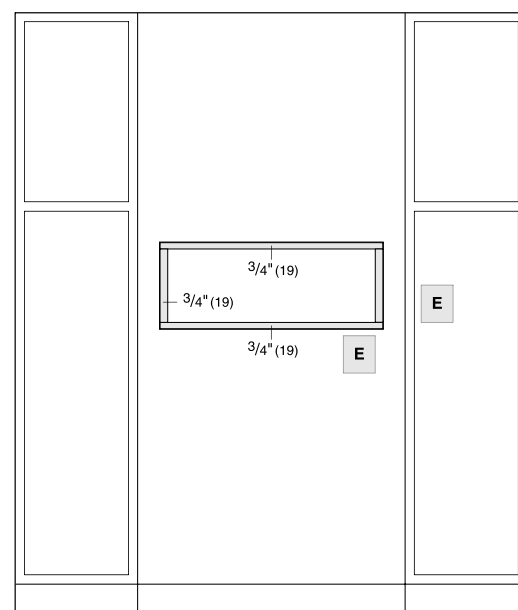

FRONT VIEW

**Will be visible and should be finished to match cabinetry.*

NOTE: Location of electrical supply within opening may require additional cabinet depth.

SHARP®

MICROWAVE DRAWER™

SMD2470AS

1.2 CU. FT*, 1000 WATTS

Easy Touch automatic drawer system smoothly opens and enables hands-free close

Convenient kitchen placement allows for easier cooking, saves prep and clean up time

Concealed control panel opens to an easy-to-read and operate 45° angle

Cooking space large enough for a 4 qt casserole dish or a 20 oz beverage

Cooking performance from one of the most trusted brands in microwaves



DESIGNED FOR YOUR DREAM KITCHEN

It's your kitchen, your design and your lifestyle. Sharp's Microwave Drawer Oven allows you to focus on the design elements you prefer by removing the microwave from sightlines and enabling more design versatility than typical built-in, over-the-range or countertop microwaves. The Microwave Drawer offers flexible placement options below an island, peninsula, or standard cabinetry, and can also be installed adjacent to your wall oven. The Microwave Drawer allows you to showcase your design savvy and create a kitchen that flows with your lifestyle.

SPECIFICATIONS

Finish	Stainless Steel
Drawer Opening	Easy Touch Automatic
Capacity*	1.2 cu. ft.
Output Power	1000 watts
Sensor Cook, Reheat and Popcorn Settings	12
Reheat Auto Settings	2
Defrost Auto Settings	6
Microwave Keep Warm Setting	Yes, up to 30 minutes
Clock and Minute Plus™	Yes
Interior Oven Light	Yes
Front-Mounted Touch Controls	Digital
Digital LCD Display	Yes
Kitchen Timer	Yes
Control Lock	Yes
Demonstration Mode	Yes
Built-In Ready for Easy Installation	Yes

DIMENSIONS (inches/lbs) & WEIGHT	
Cutout Dimensions (w x h x d)	22 1/8" x 15 9/16" x 23 1/2"
Outside Dimensions (w x h x d)	23 7/8" x 15 7/8" x 23 1/64"
Product Weight	74 lbs.
Shipping Weight	86 lbs.

ADDITIONAL SPECIFICATIONS	
Power Source	AC 120V, 60Hz / 1.67 kW, 14.5 Amps
(Voltage, Hertz / Kilowatt, Amps)	
Connection	3-prong grounding plug (included)

WARRANTY	
Parts	1 year limited
Labor	1 year limited
Magnetron	5 years (parts only)

*Internal capacity is calculated by measuring maximum width, depth, and height. Actual capacity for holding food is less.

©2015 Sharp Electronics Corporation. All rights reserved.

Sharp, Microwave Drawer, Minute Plus, Carousel and all related trademarks are trademarks or registered trademarks of Sharp Corporation and/or its affiliated companies.

Product specifications and design are subject to change without notice.

SHARP ELECTRONICS CORPORATION
Sharp Plaza, Mahwah, NJ 07495-1163
1.800.BE.SHARP • www.sharppusa.com

01-20-2015 R1 14L11

ID-24R



FEATURES

- Open and close doors silently with soft-close technology
- Accepts custom panels for an integrated look within cabinetry or stainless-steel accessory panels and handles to match other Sub-Zero, Wolf, and Cove products*
- Controls temperature within one degree of setpoint
- Assure maximum freshness with low-temp, high-humidity crisper and deli drawers
- Locks in cold air to ensure freshness with magnetic door seals
- Control brightness with soft-on LED lighting


ACCESSORIES

- Dual Installation Kit
- Egg Container
- Reduced Toekick Divider
- Stainless Steel Pro Handles
- Stainless Steel Tubular Handles
- Stainless Steel Drawer Panels With Pro Handles - 4" Toe Kick
- Stainless Steel Drawer Panels With Tubular Handles - 4" Toe Kick
- Stainless Steel Dual Installation Kickplates

Accessories are available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



HANDLE ACCESSORIES

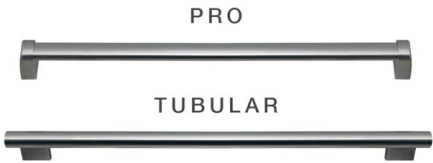


PRODUCT DETAILS

REFRIGERATOR

- Adjustable drawer dividers
- LED lighting

DIMENSIONS


*HEIGHT DIMENSION $\pm 1/2"$ (13)





PANEL SPECIFICATIONS For complete panels specifications including width/height, weight requirements and thickness requirements visit subzero-wolf.com/reveal.

NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

STANDARD INSTALLATION

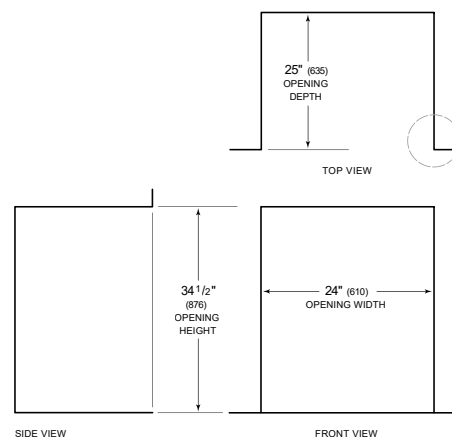

NOTE: 3 1/2" (89) finished returns will be visible and should be finished to match cabinetry

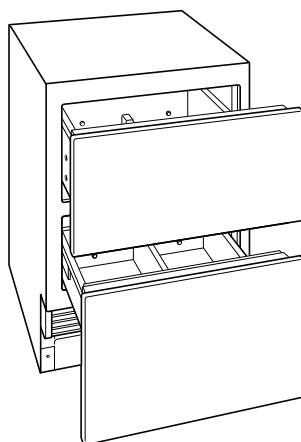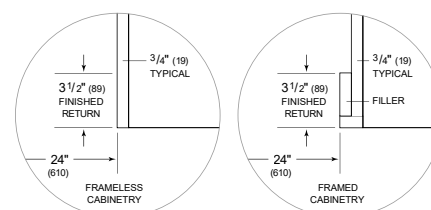

This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

SRC065 – 65 lb Gourmet Clear Ice Machine

Brilliance™ Under-Counter Gourmet Ice Machine

SRC065 – 65 lb Gourmet Clear Ice Machine



Features

- 15" cabinet width
- Produces up to 65 lbs. of gourmet ice in 24 hours
- User-friendly control panel informs whether power is on, alerts a no-water condition, and time to clean reminder
- Uses less energy and water compared to 30 lb models
- Indoor & Outdoor rated
- Accepts custom wood panels to match existing cabinetry
- Lighted bin
- Concealed Door Hinge System
- Available with built-in drain pump
- Field reversible door

24 Hour Ice Production & Storage Capacity

70°F/21°C Air 50°F/10°C Water lb / kg	90°F/32°C Air 70°F/21°C Water lb / kg	Bin Storage Capacity lb / kg
65 / 29	49 / 22.2	26 / 12



Control Board



Water Sensor



Scoop



- Units installed in elevations greater than 6,000 feet or 1,800 meters above sea level require an altitude adjustment to maintain proper ice level.



Gourmet Clear Ice



Gourmet Cube
1" x 1½" x 1¼"
(2.54 x 2.86 x 3.18 cm)

Large, slow-melting ice form, ideal for mixed drinks.


Warranty

- 1 years parts and labor on all components.
- 5 years parts on the compressor only.

Warranty valid in North America.

MACHINE SPECIFICATIONS

SRC065 – 65 lb Gourmet Clear Ice Machine

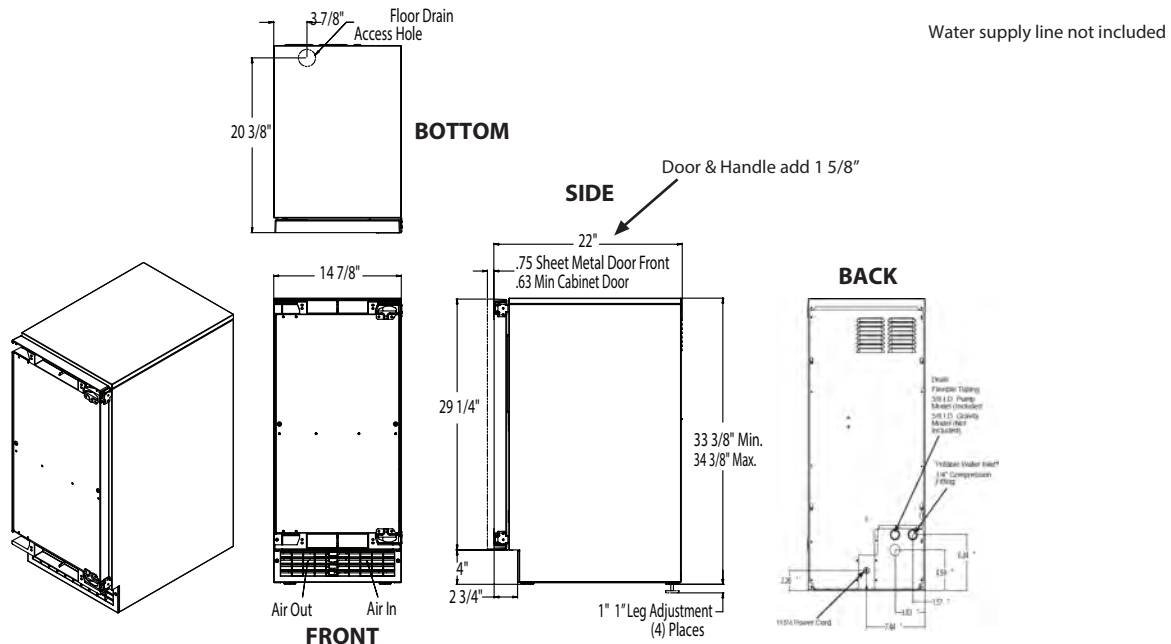

All Models

24 Hour Ice Production:
(70° Air/50° Water) 65 lb / 29 kg
(90° Air/70° Water) 49 lb / 22.2 kg

Bin Storage Capacity: 26 lb / 12 kg

Condenser Type: Air

Basic Electrical: 15a dedicated circuit required
(Volts/Hz/Phase) 115/60/1

Amps: 5

Maximum Fuse Size: 15


Refrigerant: R290

Dimensions (W x D x H):
Unit (without legs adjusted):
14.875" x 22" x 33.375"
(37.8 x 55.9 x 84.78 cm)

Shipping Carton:
18" x 28" x 38"
(45.7 x 71.1 x 96.5 cm)

Specifications

Model	Finish Cabinet / Front	Drain Type	Shipping Weight lb / kg
SRCG065A-1SU	Stainless Steel / Unfinished	Gravity	113 / 51
SRCP065A-1SU	Stainless Steel / Unfinished	Pump	118 / 54
SRCG065A-1SS	Stainless Steel / Stainless Steel	Gravity	122 / 55
SRCP065A-1SS	Stainless Steel / Stainless Steel	Pump	127 / 58

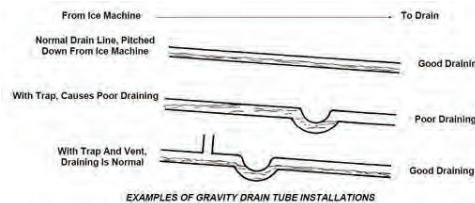

SRCP: Built-in pump to expel drain water
which includes 10' drain tube

Accessories

Model	Description	Shipping Weight lb / kg
KDFS	Stainless Steel Door Front Kit	12 / 5.5
KSSKP	Stainless Steel Kick Plate Cover	5 / 2.26
KATB	Anti-Tip Bracket Kit	2 / 0.9
KDFR	Retro-Fit Door Front Kit	8 / 3.6
19-0653	Clear One Concentrated Scale Remover	

Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Water Pressures	20 PSIG (1 bar)	80 PSIG (5 bar)
Electrical Voltage	-10%	+10%


Machine requires voltage indicated on the rating nameplate. Scotsman SRC065 and SRN110 models are approved for outdoor installations. All products must operate where air temperature does not fall below 50°F and does not exceed 100°F. Extended periods of operation at temperatures exceeding these limitations constitute misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Failures caused by improper installation are not considered factory defects. Refer to owner's manual for complete installation requirements. Please note: when installed in a corner, the door swing may be limited due to handle contact with the wall or cabinet face.

GWE22JYMFS

GE® ENERGY STAR® 21.9 Cu. Ft. Counter-Depth French-Door Refrigerator

Dimensions and Installation Information (in inches)

OVERALL DIMENSIONS	Height to top of door (in.) A	69-7/8
	Height to top of hinge (in.) B	69-3/4
	Height to top of case (in.) C	68-5/8
	Case depth without door (in.) D	24-1/8
	Case depth less door handle (in.) E	28-1/2
	Case depth with door handle (in.) F	30-15/16
	Depth with fresh food door open 90° (in.) G	43-3/8
	Width (in.) H	35-5/8
	Width with door open 90° with door handle (in.) I	43-3/8
AIR CLEARANCES	Each side (in.)	1/8
	Top (in.)	1
	Back (in.)	2

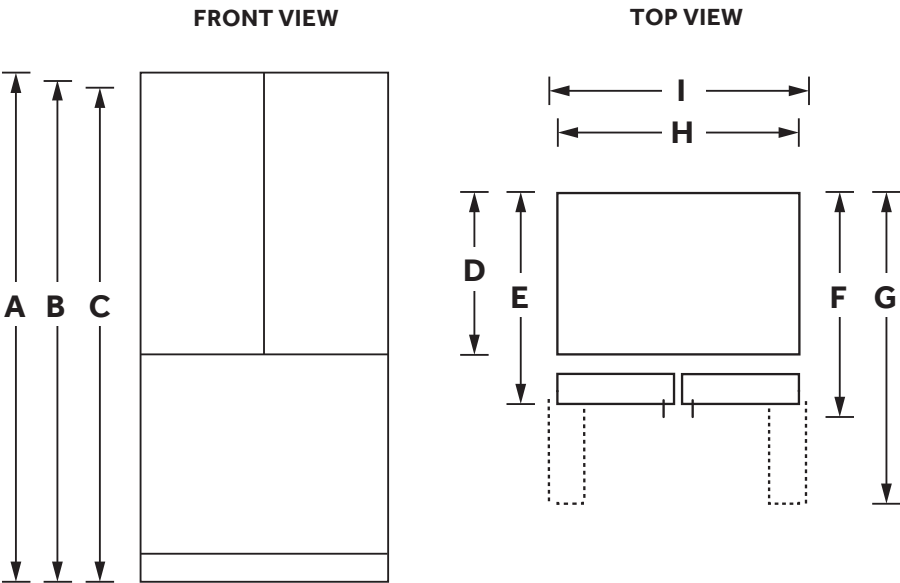

For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



GWE22JYMFS

GE® ENERGY STAR® 21.9 Cu. Ft. Counter-Depth French-Door Refrigerator

Features and Benefits

Counter-Depth Design – Offers a built-in look by fitting nearly flush with surrounding cabinetry

Internal Water Dispenser – Delivers filtered water with one touch

Factory-Installed Icemaker with Water Filtration System – Refrigerator comes ready to automatically create filtered ice

LED Lighting – Find exactly what you've been looking for under crisp, clear lighting

Two Humidity-Controlled Drawers and Full-Width Drawer – Create the right environment for keeping fruits and vegetables fresh, while easily storing wider items like a party platter or a sheet cake

Two-Level Freezer Storage Baskets – Baskets allow easy access to frozen foods

Internal Controls with Actual-Temperature Setting Display – Eliminate the guesswork of temperature setting with actual degrees displayed digitally

Quick Space Shelf – Quickly slides out of the way to make room for tall items

Advanced Water Filtration – Reduces trace pharmaceuticals from water and ice*


Spill-Proof Shelves – A variety of shelf configurations provides additional options for food storage

Gallon Door Storage – Deep bins handle large containers in the door and free up valuable shelf space

Door Alarm – Enjoy peace of mind knowing the refrigerator door is never left open

Enhanced Shabbos Mode – The Shabbos Keeper connects to your refrigerator to automatically enable Shabbos compatible modes each week and before every holiday (Shabbos Keeper sold separately – visit www.zmantechнологies.com for details)

Model GWE22JYMFS – Fingerprint Resistant Stainless

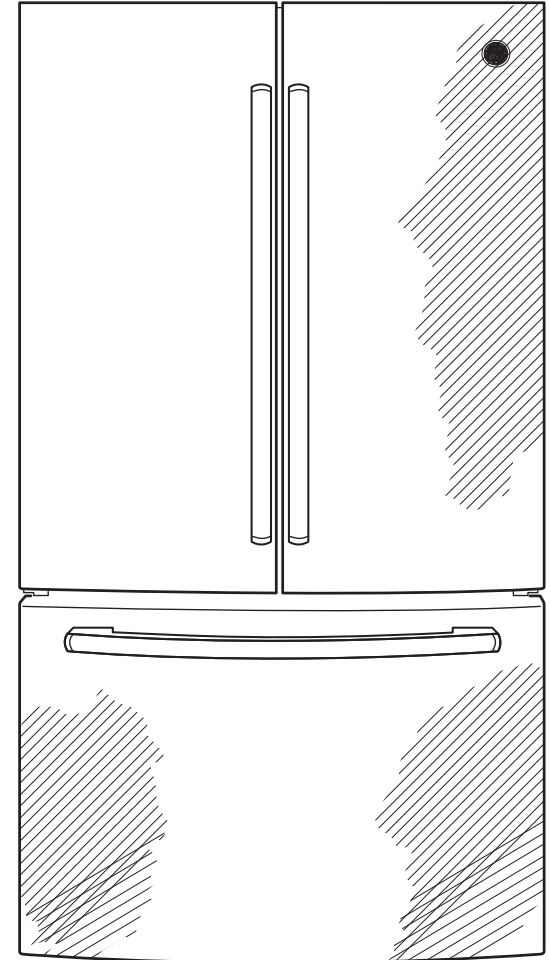

GE APPLIANCES

*Removes 98% of ibuprofen, atenolol, fluoxetine, progesterone and trimethoprim. These pharmaceuticals are not necessarily in all users' water.



Listed by
Underwriters
Laboratories



As an ENERGY STAR® partner, GE has determined that this product meets the ENERGY STAR guidelines for energy efficiency.

Specification Revised 12/24

EBS51SS1

Beverage Center | SINGLE DOOR SINGLE ZONE



EPC
TECHNOLOGY



QUIET
OPERA-



ECO - MODE



DOOR
OPEN



CON-
CEALED




HIGH
EFFICIENCY

ELICA'S EXCLUSIVE
PLUS FEATURES

RISERVA - EBS51SS1 creates the dream conditions for your favorite seltzer drinks. This 24" undercabinet refrigerator has the capacity to fit up to 100 cans (12oz). Featuring 3 adjustable slide out Plexiglass shelves, 304 Stainless Steel


frame with double layered UV resistant glass door and an exclusive concealed hinge design that delivers a more refined appear and tighter fit within cabinetry.

STORAGE CAPACITY

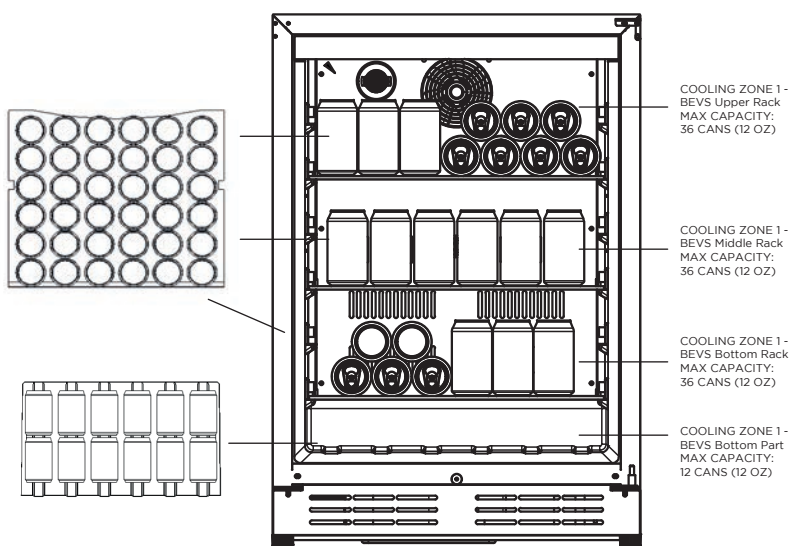

TOTAL MAX CAPACITY: 120 CANS (12 oz).

*Do not exceed Max Capacity, avoid product damage and losing warranty validation

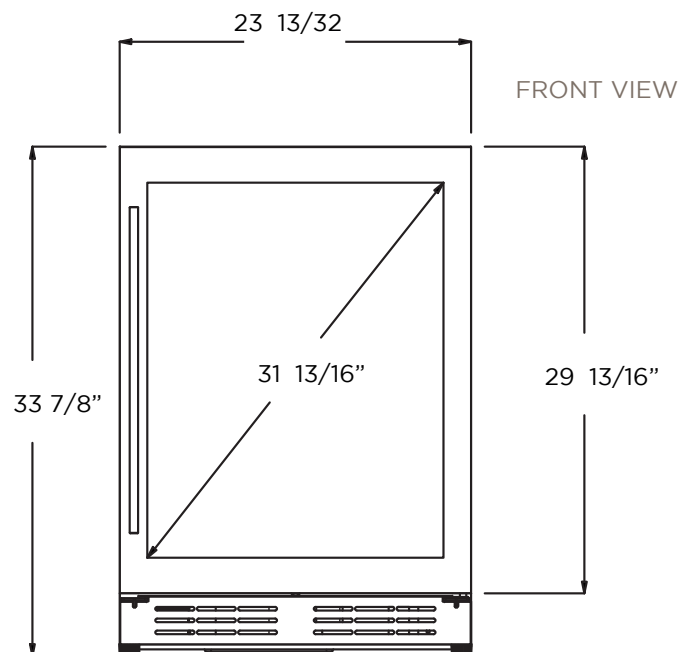



EBS51SS1

Beverage Center | SINGLE DOOR SINGLE ZONE



PRODUCT DESCRIPTION EBS51SS1		ELECTRICAL SPECIFICATIONS	
Width	24"	Compressor Brand	Embraco
Dimensions	23 13/32" W x 33 13/16" H x 23 5/8" D	Min. Circuit Required	15A
Weight	128 lbs	AC Power	110-120V/60HZ
Installation Type	Built-in and Free Standing	Amperage	0.95A
Refrigerant Type	R600a	Plug Type	B
Volume	4.8 cu ft (135L)	OTHERS	
Total Capacity	> 120 cans (12 oz cans)	Superior Full Extension Racks	
Temperature Range	34 to 65°F	Beverage Shelving made of Plexiglass	
Sound Level	39 dBA	White LED Lights with 3 level KELVIN shade adjustment	
Door Finish	304 Stainless Steel + Glass	Anti Vibration Technology	
Cabinet Finish	Black	Double Panel Glass Door, UV coated	
Interior Finish	Black	Sabbath Mode	
Hinge Design	Concealed	Stylish look with tubular handle	
Lighting	3 Level White LED		
Shelving	3 Adjustable - Slide Out-Tempered Glass Shelves with Wood and Metal front Trim (without rollers)	KITS	
		PRO Handle	KIT0175505
Controls	Capacitive Touch with Display with White Numbers		
DOOR		WARRANTY	
Door Handle	Tubular	2+1 Year Parts and In-Home Labor Warranty. Third year awarded after product registration on www.elica.com	
Door Glass	Tinted Dual Pane, Low-e Argon-filled		
Reversible Door	Yes		

LINE DRAWING

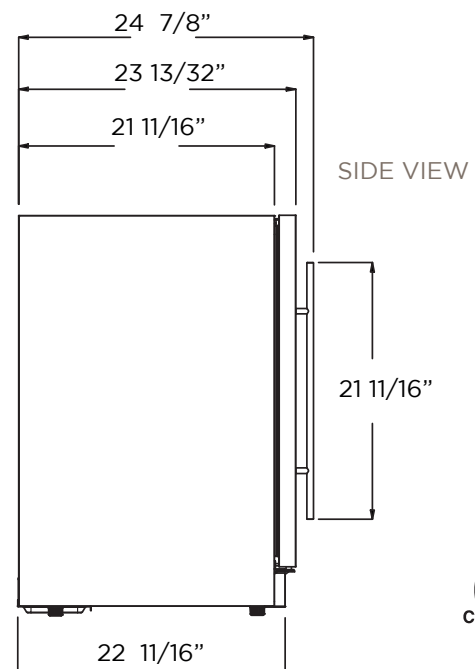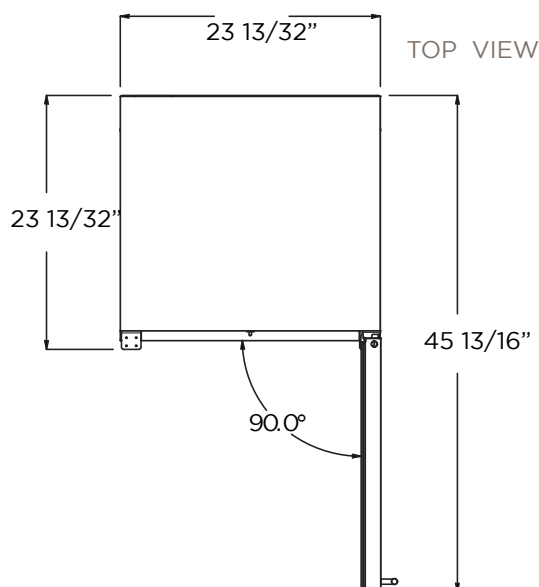

DRC033 - 30 lb Gourmet Clear Ice Machine

Legacy Under-Counter Gourmet Ice Machine



Features

- 15" cabinet width
- Produces up to 30 lbs. of gourmet ice in 24 hours
- Maintains ideal bin capacity with automatic shut-off and restart
- Accepts custom wood panels to match your decor
- Aluminum door with brushed stainless steel finish and matching exposed door frame
- Available with built-in drain pump
- Available in stainless steel finish only
- Field reversible door
- Stainless wrap-around door with towel bar handle available as an accessory (KSS model)

INDOOR ONLY

24 Hour Ice Production & Storage Capacity

70°F/21°C Air 50°F/10°C Water lb / kg	90°F/32°C Air 70°F/21°C Water lb / kg	Bin Storage Capacity lb / kg
30 / 13.6	16 / 7.2	26 / 12

- Units installed in regions of extreme weather conditions may not reach production capacities.
- Units installed in elevations greater than 6,000 feet or 1,800 meters above sea level require an altitude adjustment to maintain proper ice level.



Gourmet Clear Ice




Gourmet Cube
1" x 1 1/4" x 1 1/4"
(2.54 x 2.86 x 3.18 cm)

Large, slow-melting ice form, ideal for beverages.

Warranty

- 1 years parts and labor on all components.
- 5 years parts on the compressor only.

Warranty valid in North America.

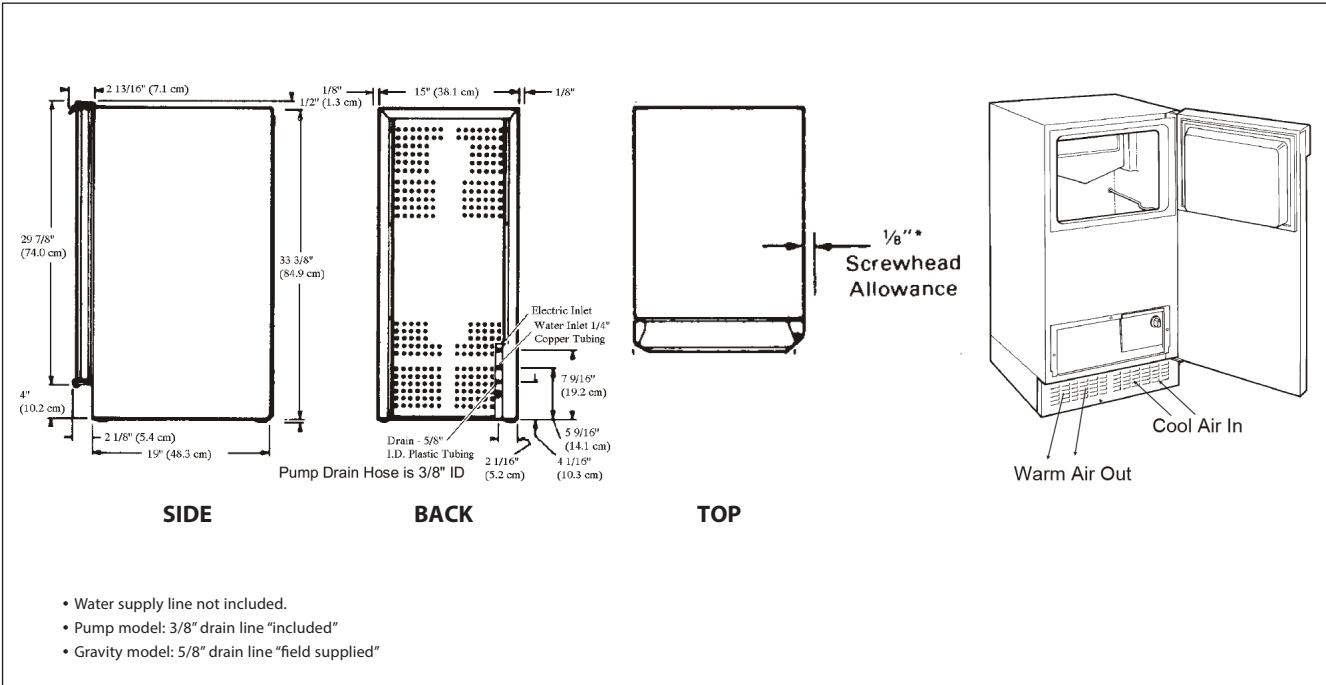

All Models

24 Hour Ice Production:
(70° Air/50° Water) 30 lb / 13.6 kg
(90° Air/70° Water) 16 lb / 7.2 kg

Bin Storage Capacity: 26 lb / 12 kg

Condenser Type: Air

Basic Electrical: 15a dedicated circuit required
(Volts/Hz/Phase) 115/60/1

Amps: 3.6

Maximum Fuse Size: 15


Refrigerant: R290

Dimensions (W x D x H):
Unit (without legs adjusted):
15" x 22.8125" x 33.875"
(38.1 x 57.94 x 86.04 cm)

Shipping Carton: 18" x 28" x 38"
(45.7 x 71.1 x 96.5 cm)

Specifications

	Model	Finish Cabinet / Front	Drain Type	Shipping Weight lb / kg
Indoor	DRC033GA-1SSD	Stainless Steel / Aluminum	Gravity	83 / 38
	DRC033PA-1SSD	Stainless Steel / Aluminum	Pump	88 / 40

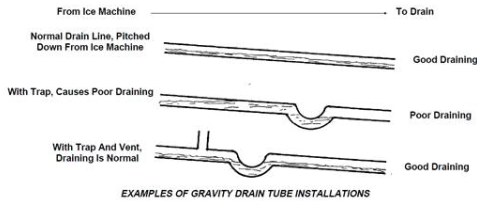

DRC033G: Gravity flow drain tube
DRC033P: Built-in pump to expel drain water which includes 10' drain tube

Accessories

Model	Description	Shipping Weight lb / kg
KHAND	Custom Handle Trim Piece (Top)	1 / 0.45
KSS	Wrap Around Stainless Steel Door Sleeve Kit	12 / 5.5
SS-33	Stainless Steel Front Panel Kit	9/4
19-0653	Clear One Concentrated Scale Remover	

Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	90°F (38°C)
Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)
Electrical Voltage	-10%	+10%

Machine requires voltage indicated on the rating nameplate. Scotsman SRC065 and SRN110 models are approved for outdoor installations. All products must operate where air temperature does not fall below 50°F and does not exceed 100°F. Extended periods of operation at temperatures exceeding these limitations constitute misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Failures caused by improper installation are not considered factory defects. Refer to owner's manual for all installation requirements. Please note: when installed in a corner, the door swing may be limited due to handle contact with the wall or cabinet face.

EC2450TE/S**FEATURES**

Full-color touchscreen simplifies use and adds refinement to the design

Save favorites within six independent user profiles for a perfect cup that's just a touch or two away

Easily customize every aspect of your beverage, including type, strength, temperature, quantity, and milk preference

Beverage options include Americano, Cappuccino, Coffee, Doppio, Espresso, Flat White, Hot Milk, Hot Water, Latte, Latte Macchiato, Long Coffee, Macchiato, Milk Froth, Steam

Insulated milk container with light-to-thick froth regulator

Accepts whole bean or ground coffee

The large 84.5-ounce water tank yields 6 cups of 9 oz coffee before needing to be refilled

Dual-dispensing spout easily adjusts to the height of your cup

Self-cleaning system ensures your perfect cup is only moments away—no cumbersome cleanup

Discreet in-unit storage

Installs nearly anywhere—without special water lines

The elegant, modern aesthetic perfectly pairs with a full suite of similarly styled Sub-Zero, Wolf, and Cove appliances

Built with premium-grade materials, Wolf products are designed to last a minimum of 20 years

ACCESSORIES

Care Kit

Charcoal Filter

Coffee Pot

Descaling Solution

Insulated Milk Container

Accessories available through an authorized dealer.

For local dealer information, visit subzero-wolf.com/locator.






PRODUCT SPECIFICATIONS


Model	EC2450TE/S
Dimensions	23 1/2"W x 17 7/8"H x 19"D
Weight	67 lbs
Electrical Supply	120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Power Cord Length	6 Feet
Receptacle	3-prong grounding-type

ELECTRICAL



NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

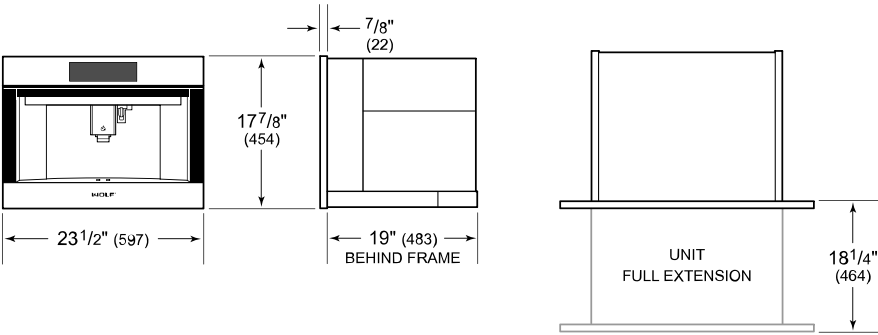

FLUSH INSTALLATION



**Will be visible and should be finished to match cabinetry.
**Dimension provides minimum reveals.*