

NOTES:


- STREET TREES ARE TO BE PLANTED ALONG ROADWAYS THROUGHOUT THE SINGLE FAMILY PORTION OF SITE
- ALL PROPOSED STREETS SHALL HAVE STREET TREES PLANTED 40 - 50 FEET APART.
- STREET TREES SHALL BE PLANTED A MINIMUM OF ~~3.0'~~ 8' FROM THE RIGHT OF WAY ON PRIVATE PROPERTY.
- ALL NEW TREES SHALL BE GROWN IN A NURSERY COMPATIBLE WITH USDA PLANT HARDINESS ZONE 5A.
- MINIMUM OF 25.0' FROM THE CORNER OF AN INTERSECTION TO PLANT A STREET TREE TO MAINTAIN VISION CLEARANCE.
- ACCEPTABLE STREET TREE SPECIES

BOTANICAL NAME	COMMON NAME	SIZE
- ACER FREEMANII ' AUTUMN FANTASY'	AUTUMN FANTASY MAPLE	2" CAL
- ACER RUBRUM 'RED SUNSET'	RED SUNSET MAPLE	2" CAL
- BETULA NIGRA 'HERITAGE'	HERITAGE RIVER BIRCH	2" CAL
- GLEDITSIA TRIACANTHOS INERMIS 'SHADEMASTER'	SHADEMASTER LOCUST	2" CAL
- GYMNOCLADUS DIOICA	KENTUCKY COFFEE TREE	2" CAL
- QUERCUS X SCHUETTI	SWAMP BUR OAK	2" CAL
- TILIA TOMENTOSA 'STERLING'	STERLING SILVER LINDEN	2" CAL

NORTH

GRAPHICAL SCALE (FEET)

0 1" = 80' 160'

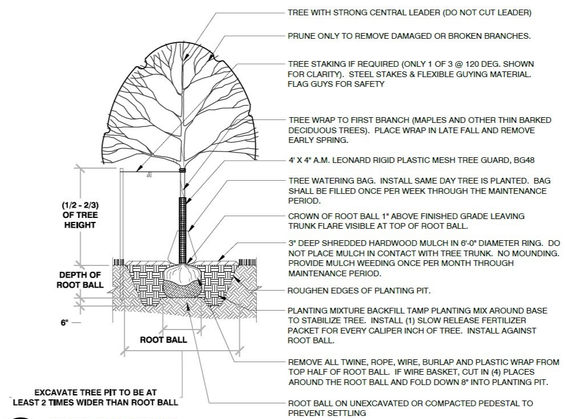

1 TREE PLANTING

1/4" = 1'-0" 32 9343-01

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

DRAFTED: SAT DESIGNED: SAT REVIEWED: DJB

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING | NATURAL RESOURCES | SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE : NATIONWIDE

CANOPY HILL- PHASE 2B

UNION GROVE, WISCONSIN

PHASE 2B STREET TREE PLAN

REVISIONS

1	PER VILLAGE COMMENTS	04/21/23	5	HYDRANT ADJUSTMENTS	03/28/24
2	PER VILLAGE COMMENTS	05/16/23			
3	PER VILLAGE COMMENTS	05/24/23			
4	CONSTRUCTION DOCUMENTS	06/26/23			

PEG JOB No. 959.00
PEG PM AEK
START DATE 11/06/20
SCALE 1"=80'

SHEET L-1 L-1

© COPYRIGHT 2019

PHASE 2B STREET TREE PLAN

Z:\PROJECTS\2017\959.00-WI\CAD\SHEETS\PHASE 2\959.00-WI PH 2 STREET TREE PLAN.DWG

www.pinnacle-engr.com