SMALL MACHINE

Owner to mail in deposit of 1300.

COPY

06-03C

McCOY CONTRACTORS

2116 W. CORNELL STREET
MILWAUKEE, WISCONSIN 563209
414-445-4045

MILWAUKEE'S OLDEST & LARGEST FOUNDATION SPECIALIST

OWNER William Bracket PHONE 414-545-8388 DATE 3-31-06

ADDRESS 4430 W. Manitoba St Milwaukee WI ZIP 53219

PAGE 1 OF 2 PAGES

AGE OF BLDG.	OWNED FOR	PROBLEMS FOR	CONSTRUCTION	DEPTH	DRAIN TILE	SUMP PUMP
1939 YRS.	10 YRS.	? YRS.	Block	7 FT.	Yes	No

ANALYSIS Water high on wall

McCOY CONTRACTORS, INC. HEREINAFTER REFERRED TO AS McCOY, PROPOSES TO FURNISH ALL LABOR, MATERIAL AND EQUIPMENT NECESSARY TO PERFORM THE FOLLOWING WORK. EXCLUDING ELECTRICAL, PLUMBING AND AIR CONDITIONING.

- Cover lawn and prepare landscape
- Safeguard streets & secure area.
- Excavate East wall down to footing (Per drawing)
- Remove all debris to authorized dump.
- Hand scrape dirt from wall.
- Wire brush wall to expose cracks and patch
- Flush and test exterior bleeders
- McCoy Contractor to test interior drain tile
- Apply black mastic to entire wall to ground level.
- Custom fit exterior tile to existing system and test.
- Backfill 100% stone with block footings where new concrete will be Poured.
- Remove existing brick supports that hold the deck. Replace with post footings. (Same location.)
- Replace concrete off of East door. Approx 10'x8'
- Replace Concrete patio where excavating was done Approx 6'x17'
- Walk customer thru entire job upon completion

STARTING DATE _____ COMPLETION DATE _____

CONTRACTOR GUARANTEES FOR A PERIOD OF 10 YEARS THE REPAIR OR REPLACEMENT OF ANY DEFECTIVE WORK AT NO ADDED COST. CONTRACTOR SHALL NOT BE RESPONSIBLE FOR ANY FOUNDATION SETTLING AND CRACKING AS A RESULT OF SUB-SOIL MOVEMENT. THE GUARANTEE DOES NOT COVER DAMPNESS ON THE BASEMENT WALLS OR FLOOR

I HAVE READ THE REVERSE SIDE OF THIS PROPOSAL AND UNDERSTAND THIS AGREEMENT IS SUBJECT TO THOSE CONDITIONS. THE CONDITIONS, SPECIFICATIONS, PRICES AND TERMS ARE SATISFACTORY AND HEREBY ACCEPTED.

TOTAL COST	12,500.
DEPOSIT	1300.
1/3 ON START	
PAY FOREMAN ON COMPLETION	11,200.

ACCEPTED W.J. Bracket DATE 3-31-06

DATE _____

ESTIMATOR Bob Donovan APPROVED BY _____ DATE 3-31-06

FOR McCOY CONTRACTORS, INC.

YOU, THE BUYER, MAY CANCEL THIS TRANSACTION AT ANY TIME PRIOR TO MIDNIGHT OF THE THIRD BUSINESS DAY AFTER THE DATE OF THIS TRANSACTION, SEE ATTACHED NOTICE OF CANCELLATION FORM FOR AN EXPLANATION OF THIS RIGHT. THIS ESTIMATE MAY BE WITHDRAWN BY McCOY CONTRACTORS, INC. IF NOT ACCEPTED WITHIN _____ DAYS.

McCOY CONTRACTORS

2116 W. CORNELL STREET
MILWAUKEE, WISCONSIN 563209
414-445-4045

MILWAUKEE'S
OLDEST & LARGEST
FOUNDATION SPECIALIST

OWNER William Bouchat PHONE 414-545-8388 DATE 3-31-06

ADDRESS 4430 W. Manitoba St. Milwaukee WI ZIP 53219

PAGE 2 OF 2 PAGES

AGE OF BLDG.	OWNED FOR	PROBLEMS FOR	CONSTRUCTION	DEPTH	DRAIN TILE	SUMP PUMP
1934 YRS.	10 YRS.	2 YRS.	Block	7 FT.	Yes	No

ANALYSIS Water high on wall

McCOY CONTRACTORS, INC. HEREINAFTER REFERRED TO AS McCOY, PROPOSES TO FURNISH ALL LABOR, MATERIAL AND EQUIPMENT NECESSARY TO PERFORM THE FOLLOWING WORK. EXCLUDING ELECTRICAL, PLUMBING AND AIR CONDITIONING.

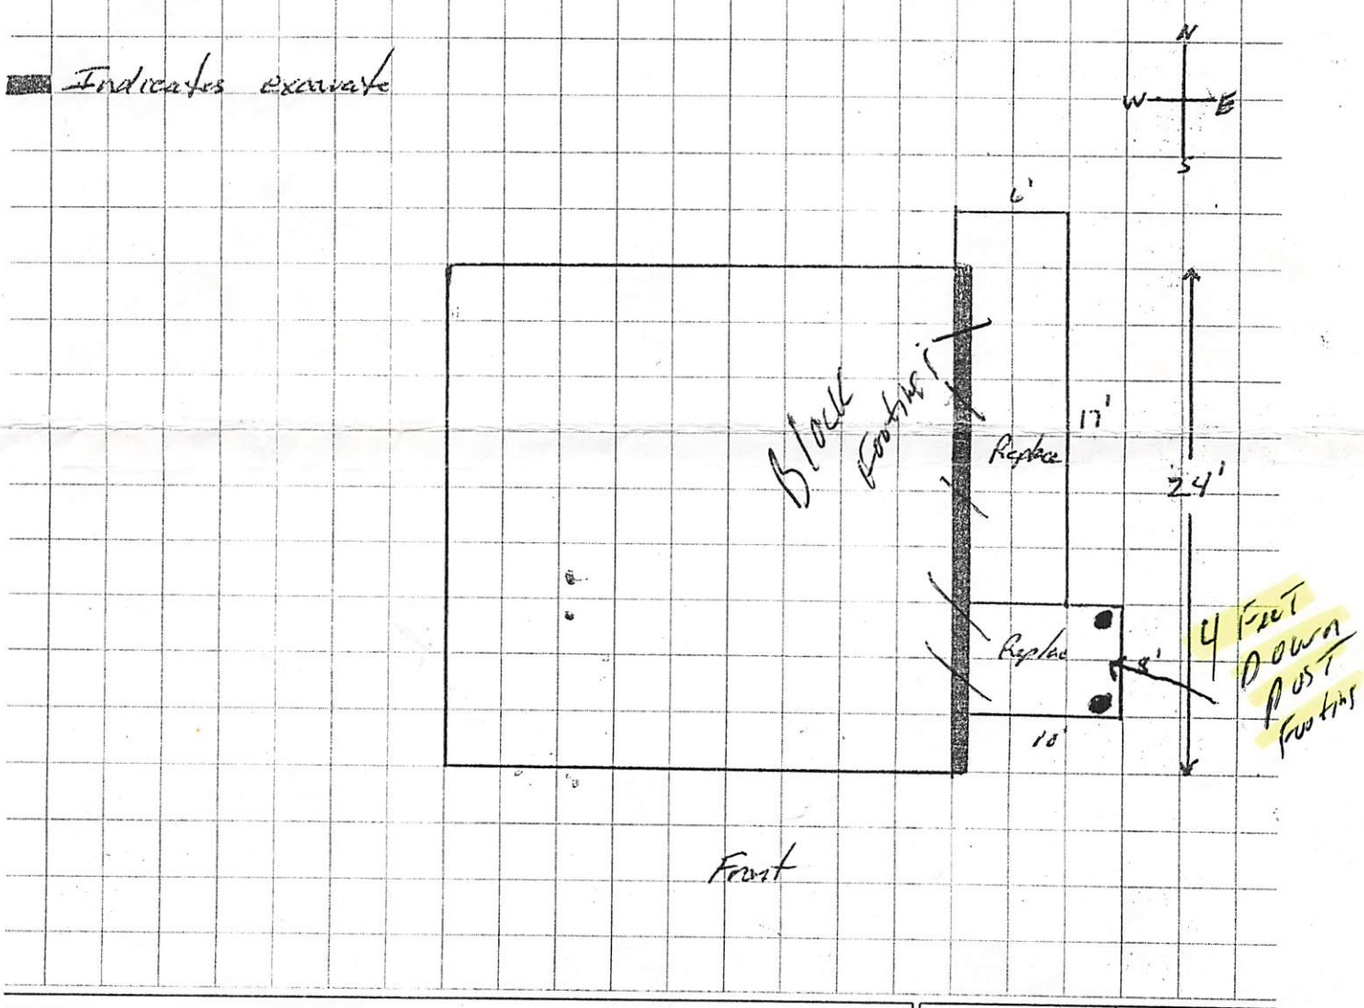

STARTING DATE _____ COMPLETION DATE _____

CONTRACTOR GUARANTEES FOR A PERIOD OF 10 YEARS THE REPAIR OR REPLACEMENT OF ANY DEFECTIVE WORK AT NO ADDED COST. CONTRACTOR SHALL NOT BE RESPONSIBLE FOR ANY FOUNDATION SETTLING AND CRACKING AS A RESULT OF SUB-SOIL MOVEMENT. THE GUARANTEE DOES NOT COVER DAMPNESS ON THE BASEMENT WALLS OR FLOOR

I HAVE READ THE REVERSE SIDE OF THIS PROPOSAL AND UNDERSTAND THIS AGREEMENT IS SUBJECT TO THOSE CONDITIONS. THE CONDITIONS, SPECIFICATIONS, PRICES AND TERMS ARE SATISFACTORY AND HEREBY ACCEPTED.

TOTAL COST	
DEPOSIT	
1/3 ON START	
PAY FOREMAN ON COMPLETION	

ACCEPTED W J Bouchat DATE 3-31-06

DATE _____

ESTIMATOR Bob Donovan APPROVED BY _____ DATE 3-31-06

FOR McCOY CONTRACTORS, INC.

YOU, THE BUYER, MAY CANCEL THIS TRANSACTION AT ANY TIME PRIOR TO MIDNIGHT OF THE THIRD BUSINESS DAY AFTER THE DATE OF THIS TRANSACTION, SEE ATTACHED NOTICE OF CANCELLATION FORM FOR AN EXPLANATION OF THIS RIGHT. THIS ESTIMATE MAY BE WITHDRAWN BY McCOY CONTRACTORS, INC. IF NOT ACCEPTED WITHIN _____ DAYS.

